


# Bugbox

*A new level of versatility, efficiency  
& power in a compact space*



**Baker**

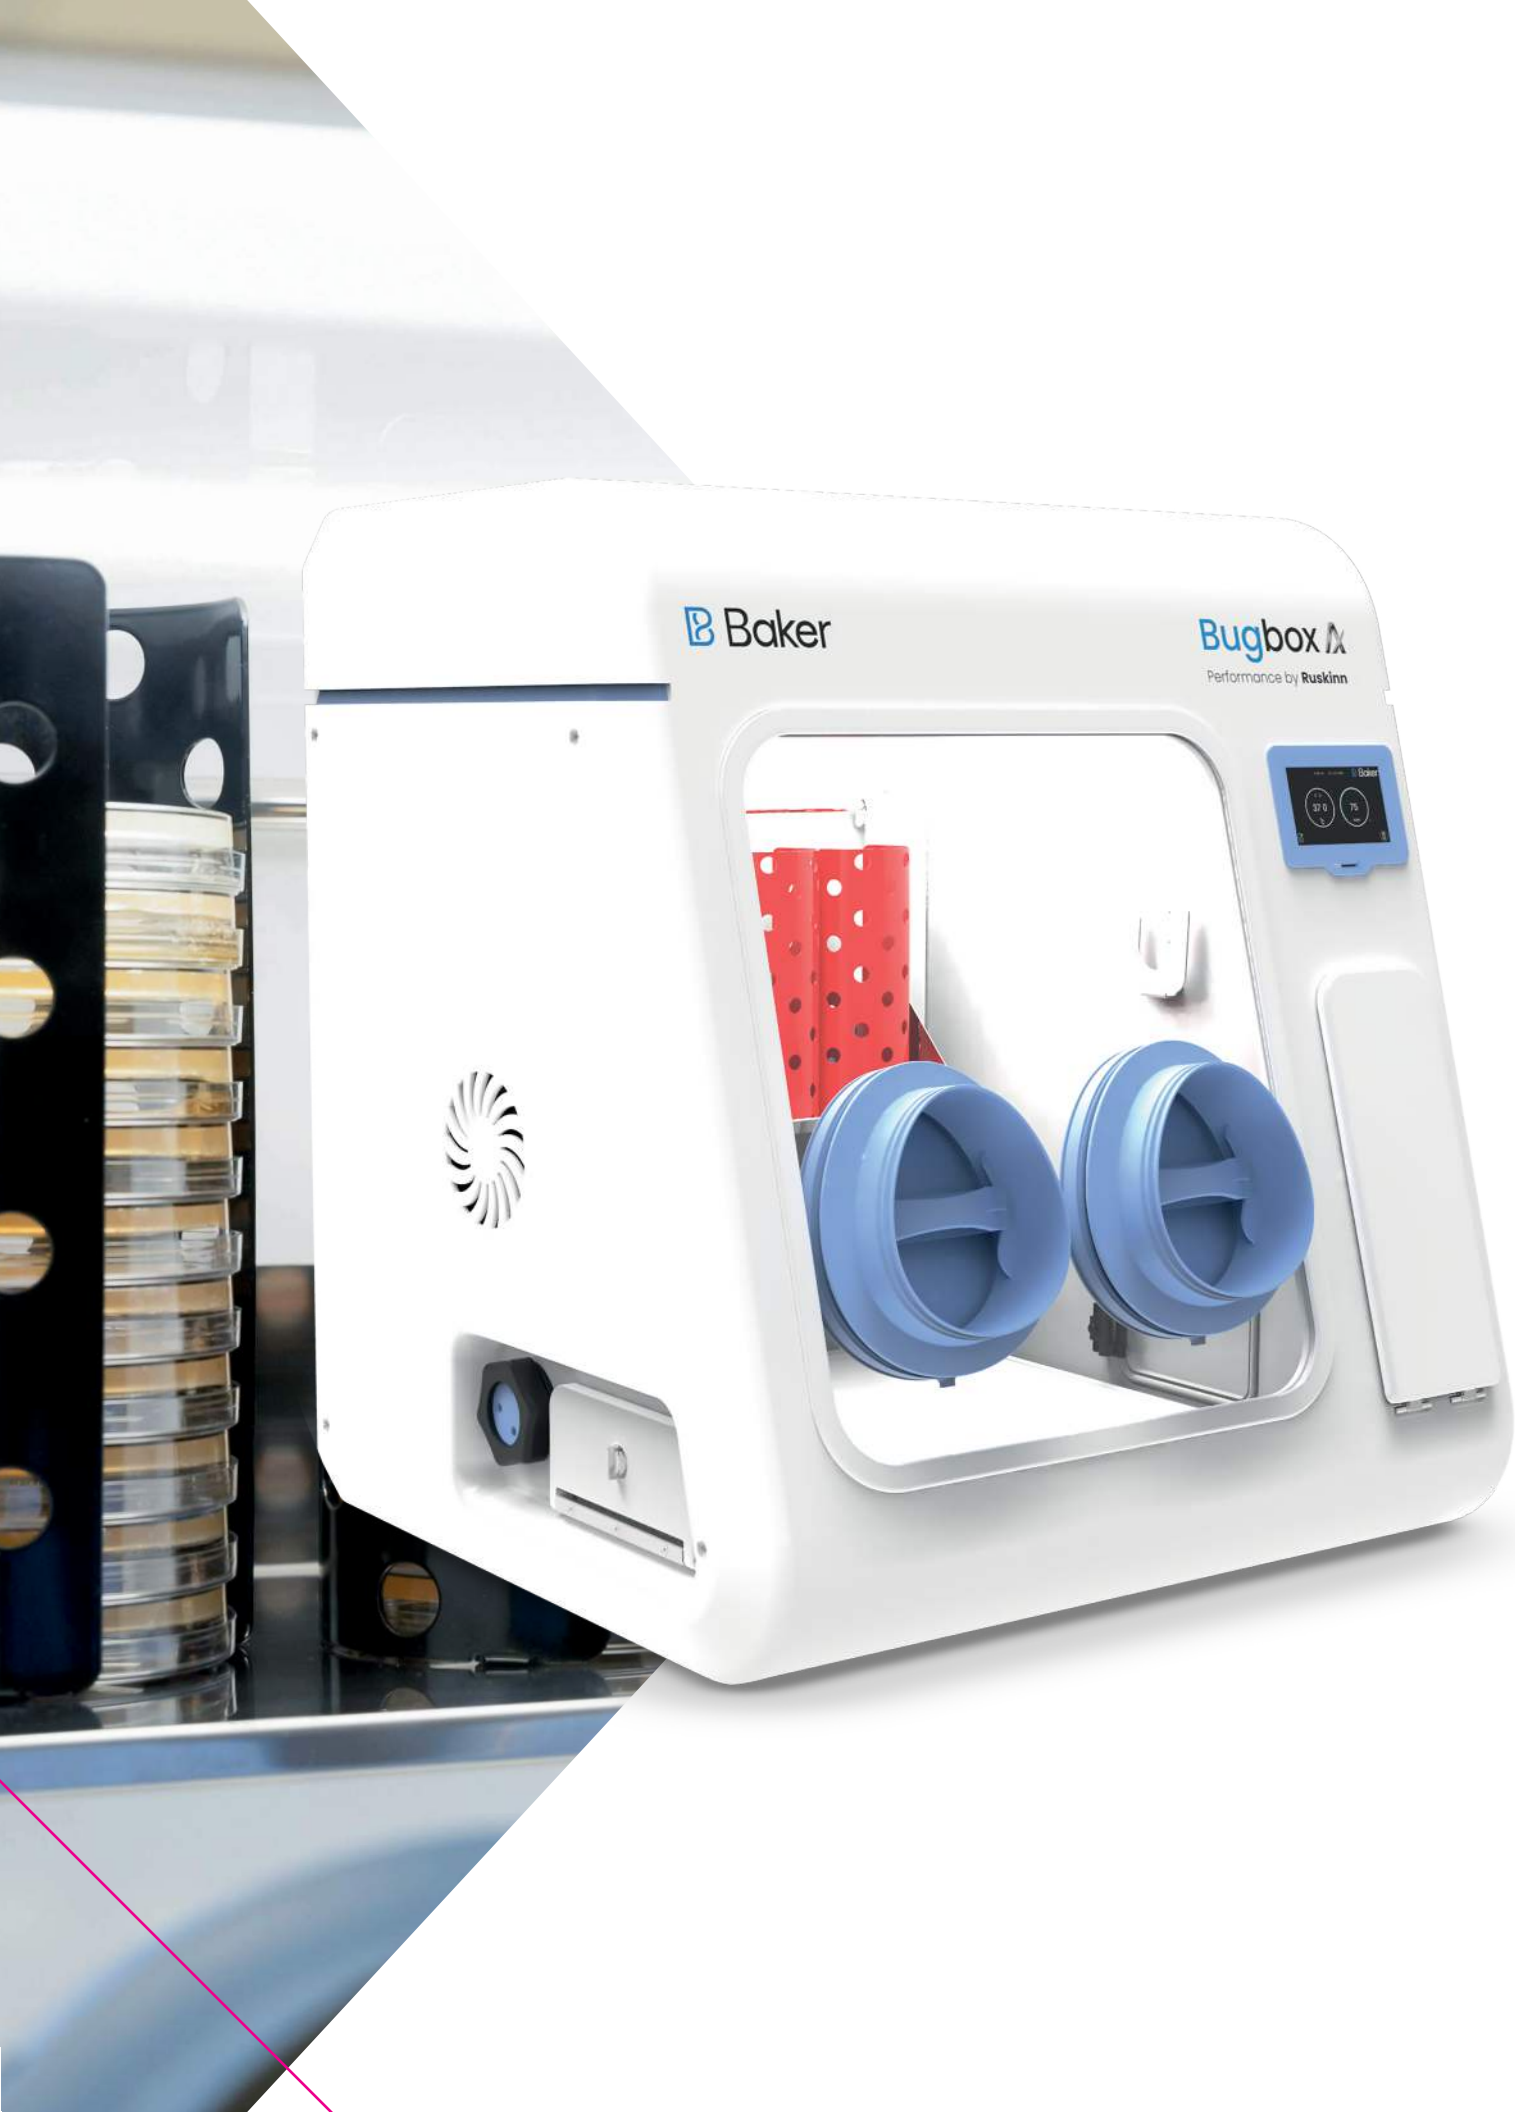

## Versatile & Flexible to Fit Any Lab Space

### BUGBOX

#### Anaerobic & Microaerophilic Workstations

For over 25 years Baker anaerobic workstations have been the trusted choice for laboratories around the world. More than 1000 anaerobic workstations are installed in more than 40 countries - and more than 300 research publications feature the Baker anaerobic technology.

Our anaerobic workstations are designed to help microbiologists cope with rising workloads and provide the best primary isolation rates.

Designed to help with rising workloads and increase primary isolation rates, Bugbox provides quick and easy access via the Ezee Sleeve™ Glove ports, energy-saving lighting that provides perfect illumination, and is easy to use. The interlock system allows simple and fast transfer of plates into the anaerobic chamber. Adjustable temperature and humidity provide a stable and strictly controlled anaerobic environment that is optimal for obligate anaerobes, and plates can be examined without exposing them to oxygen.

Its compact size meets the needs of the smallest laboratory spaces, and compared to approximately 20 anaerobic jars per week, Bugbox is economical with a lower cost per plate, is more reliable, and provides a stable atmosphere, with minimal maintenance.



## PRECISION CONTROL FOR OPTIMAL ENVIRONMENT

- Accurate temperature control from ambient + 5°C to 45°C.
- Accurate and automated humidity control, no dry spots.
- Palladium catalyst maintains anaerobic environment, plus anaerobic color-indicator strips verify anoxic conditions. Optional real time O<sub>2</sub> monitoring available.
- Ezee Sleeve™ Direct Hand entry system allows access without disrupting the atmosphere within the chamber.

## DESIGNED FOR STRICT, STABLE, ANAEROBIC CONDITIONS

The acrylic airtight chamber is flooded with anaerobic gas mix (H<sub>2</sub> in N<sub>2</sub>) and O<sub>2</sub> is displaced.

If any O<sub>2</sub> remains or is allowed to enter, it is "scavenged" by a palladium catalyst situated under the floor tray - the O<sub>2</sub> reacts with the H<sub>2</sub> to form water.

Interlock uses an N<sub>2</sub> purge, so when a user brings in plates through the interlock, no O<sub>2</sub> enters the main chamber.

Gloveless Ezee Sleeves™ are purged using N<sub>2</sub> gas via foot pedals, so no O<sub>2</sub> enters the main chamber when the glove ports are opened.



# The Bugbox Family

## ANAEROBIC & MICROAEROBIC WORKSTATIONS



Multiple models and a variety of options are available to fit your specific needs.



Bugbox A

- 270 Plate Capacity
- 0.5m<sup>2</sup> / 5.77ft<sup>2</sup> bench footprint
- 30 Plate Capacity Interlock
- Intuitive Touchscreen Interface



Bugbox M

For optimal microaerophilic environments, Bugbox M includes the ICONIC™ gas mixing system to create the perfect conditions for growing facultative and microaerophilic bacteria.

## ECONOMIC AND RELIABLE FOR LONG TERM SAVINGS

- Standard dual gas operation, low gas consumption and running costs.
- Lower cost per plate compared to anaerobic jars.
- Minimal maintenance and downtime.

## CONVENIENT & COMFORTABLE USER EXPERIENCE

- Compact Footprint**  
 Elegant design allows for 270 plate capacity (90 mm plates) without taking up valuable bench space. (W 790 mm, D 679 mm)
- Quick and Easy Direct Access**  
 Gloveless, cuffed sleeve system (Ezee Sleeve™) takes less than 40 seconds for direct hand access to the chamber.
- Single Plate Entry System**  
 Optional SPES is a mailbox like slot allowing for quick side entry or exit of individual plates, bypassing the interlock.
- Energy Saving Lighting**  
 Reads plates under perfect illumination without O<sub>2</sub> exposure.
- Innovative Interlock System**  
 Allows for convenient loading of plates with 30 plate capacity (90 mm plates) and interlock cycle of just 30 seconds.
- O<sub>2</sub> Conditions Monitor**  
 Optional Oxygen conditions monitor gives you real time O<sub>2</sub> display.



## Technical Specifications – Bugbox

Model		Bugbox Ax	Bugbox M
External Dimensions	Width	790 mm	800 mm
	Depth	679 mm	660 mm
	Height	872 mm	650 mm
Internal Dimensions	Width	540 mm	500 mm
	Depth	546 mm	460 mm
	Height	535 mm	420 mm
Maximum Capacity	90 mm Plates	270	270
Working Capacity	90 mm Plates	270	200
Interlock Dimensions	Width	149 mm	100 mm
	Depth	253 mm	100 mm
	Height	285 mm	200 mm
Interlock Capacity	90 mm Plates	30	10
Interlock Time Cycle		30 sec.	15 sec.
Interlock Door Operation		Manual	Manual
Weight		53 kg / 117 lbs	99 lbs / 143 lbs
Interlock Petri Dish Holder Capacity		2	3

## Standard Features

- Detox advanced carbon filtration system
- Automatic Humidity Control
- Temperature Control
- Low Gas Alarm
- Palladium Catalyst
- Anaerobic Indicator Strips
- Touchscreen Interface (Bugbox Ax)
- Interlock
- Ezee Sleeve™ Direct Hand Entry System
- Energy Saving LED Illumination
- 2 x Large Petri Dish Holders
- Data logging

## Optional Features

- Anaerobic Conditions Monitor
- Vacuum Line Port
- Gas Sample Port
- Cable Gland Port
- Multi-cable gland (up to 6 individual cables)
- Internal Electric Socket
- Gas Tank Regulators and Filter Modules
- Workstation Stand
- Power Failure Back up System,
- Single Plate Entry System (SPES)
- Microaerophilic Conditions for User Defined Control of O<sub>2</sub> and CO<sub>2</sub>. (Bugbox M Model Only)



## ANAEROBIC & MICROAEROBILIC WORKSTATIONS

If you are looking for more robust processing power and capacity, the modular Concept range of workstations are the perfect addition to any lab.



 Baker



[bakerco.com](http://bakerco.com)

