

# Intelligent Healthcare

Leading Edge AI in Healthcare

- ／ Medical Computing
- ／ Medical Imaging
- ／ Medical Specialties
- ／ Medical Mobility
- ／ iHospital Solutions



**ADVANTECH** **iHealthcare**



**Microsoft**  
Solutions Partner

[www.advantech.com](http://www.advantech.com)

# Edge AI Platforms for Innovating Healthcare

- Knowledge and expertise
- Extensive industry experience
- Dedicated R&D
- Strict revision control
- Customization capabilities

As a leading provider of digital healthcare solutions, Advantech has collaborated with international medical equipment manufacturers and system integrators to develop its core competencies. Advantech's iHealthcare division assists hospitals and healthcare providers with establishing patient-centered treatment environments equipped with innovative digital healthcare platforms for delivering quality patient care.

All our medical computing solutions feature high-performance systems designed with the utmost quality to provide reliable support for critical healthcare applications. Built to satisfy strict industry regulations, Advantech's medical computing systems comply with UL60601-1 and EN60601-1 medical safety standards, feature IPX1-rated ingress protection and drip-proof enclosures, and are CCC certified for electrical safety. In addition to offering long-term product support, Advantech ensures that all its solutions are highly reliable, easy to install, and can be seamlessly integrated into existing hospital infrastructures.




## Point-of-Care Specialty Treatment

Increase healthcare accessibility  
and efficiency



## Nursing iWard S

Streamline workflow  
patient

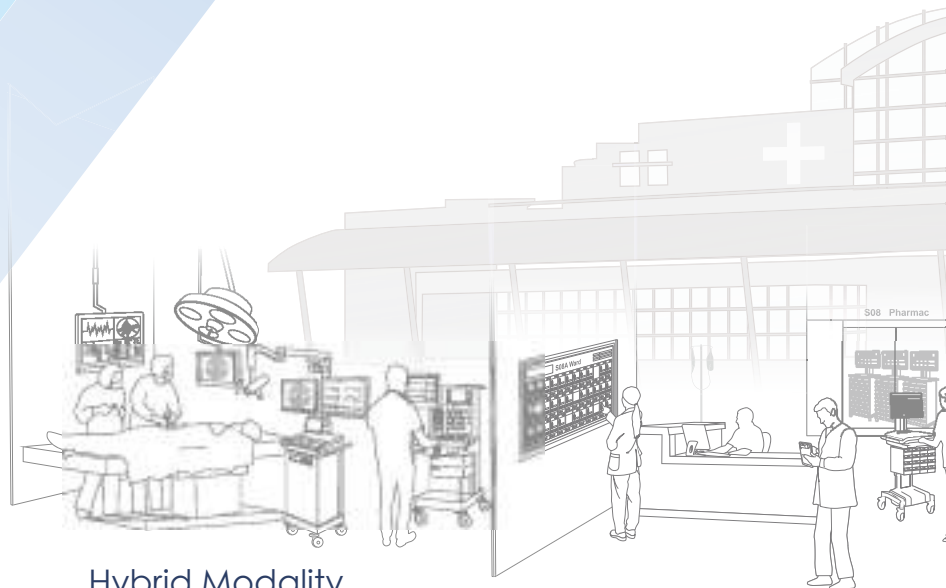

Hybrid Modality

Device Usability  
Medical Equipment

iMedication  
Command Center  
Medical Video  
Interop

# Table of Contents

General Introduction .....	1
Solutions	
Medical Computing .....	3
Medical Imaging .....	5
Medical Specialties .....	7
Intelligent Medical Carts .....	9
Medical Tablets .....	13
iHospital Solutions .....	15
Application Stories .....	19
Product Selection Guide .....	23



## Care & Solutions

Shows and improve  
t care



## Mobile Medical Care

Enable patient-centric treatment




## OR Video Management

Improve surgical outcomes with  
interoperability



## Medical Specialty Equipment

Flexible to be customized and  
deployed

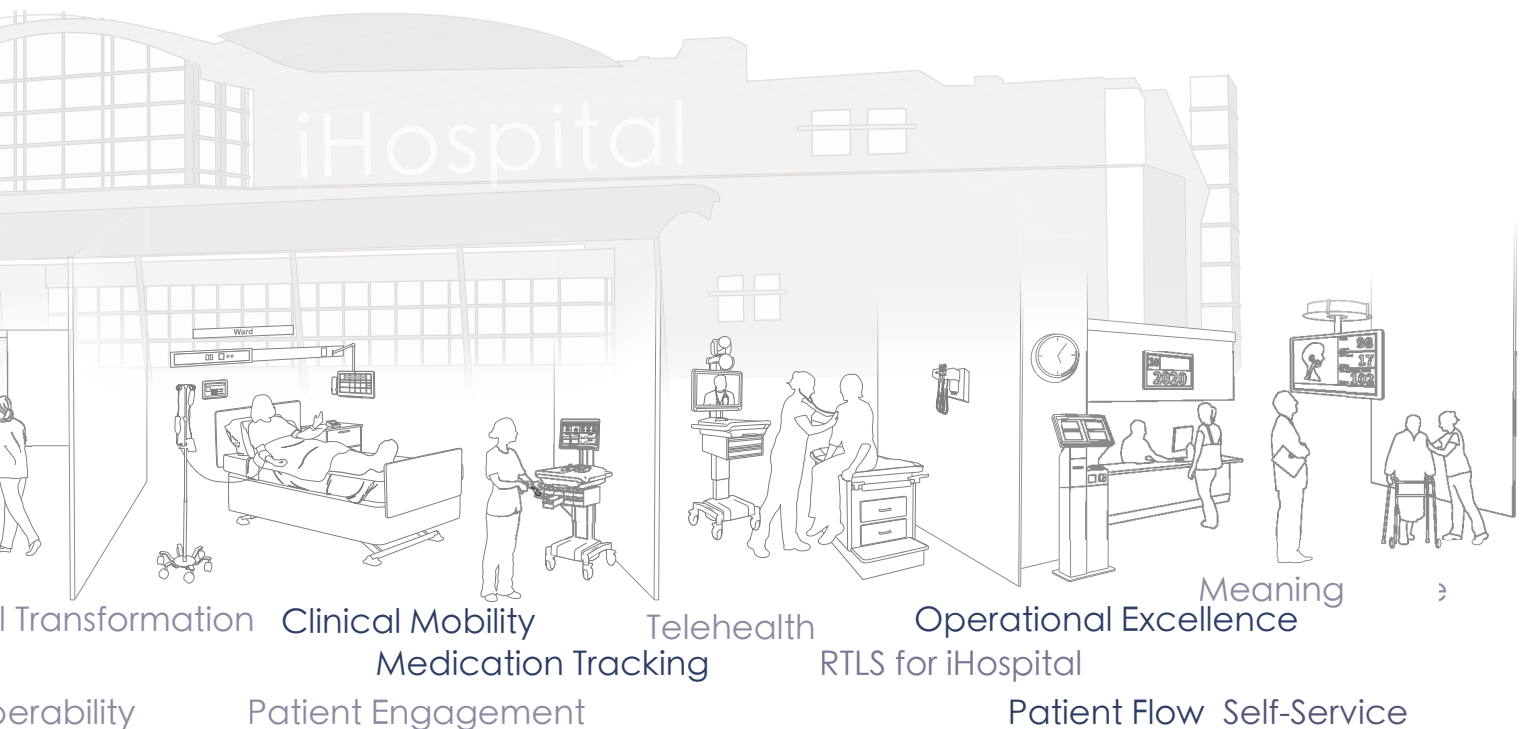




# Medical Computing

Healthcare organizations have experienced an explosion of data and are adopting edge computing architecture to digitize and improve patient care. To facilitate the digital transformation of healthcare, Advantech has developed its POC series for HMI and critical surgical applications, the HIT series for iWard and nurse call applications, and the USM series for AI healthcare applications.



## Perioperative Information Systems in ORs

Perioperative information systems support clinical and administrative decision-making regarding preoperative, intraoperative, and postoperative procedures. Such solutions include a comprehensive anesthesia information system that documents each phase of the procedure and is integrated with patient monitoring equipment and anesthesia machines.

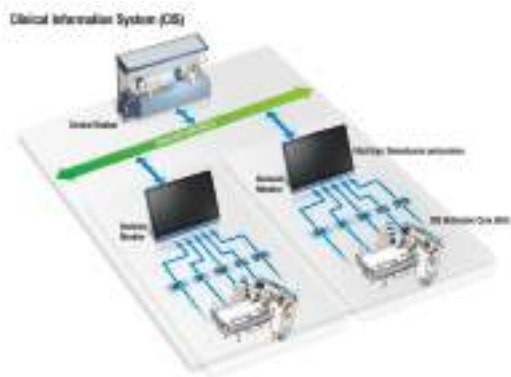

## Clinical Information Systems for Intensive Care

Clinical information systems integrate patient care applications and data management tools to facilitate rapid, informed decision-making at the point of care. These systems are employed in ICUs and at patient bedsides, can be accessed via the hospital network or an online browser, and improved data access in wards and during patient consultations.



**Medical  
Certification**



**Modularized  
Design**



**Customization  
Service**



**High  
Performance**

# Industrial-Grade Mounting Solution

The ARES Industrial-Grade Mounting Solution is dedicated to providing reliable, adaptable, and modular mounting products designed with ergonomics in mind.



**One-Stop  
Shopping Solution**



**Tug-Resistant  
VESA Mount**



**Ergonomic  
Design**



**Customization  
Service**



## Medical All in One

### POC Series



**POC-4 Series**  
**Modularized**  
Clinical and mobile cart applications



**POC-6 Series**  
**Mainstream**  
PDMS in ICU and OR radiologic image displays



**POC-8 Series**  
**High-Performance**  
Image processing for medical specialties



## Healthcare Information Terminals

### HIT Series



**HIT-3 Series**  
**General Healthcare HMI**  
Integrated HMI for healthcare needs



**HIT-5 Series**  
**Nurse Call & Patient Care Focus**  
Information terminal for bedside and nurse station applications



## Medical Edge AI Box PCs

### USM Series



**USM-100 Series**  
**Fanless Box PC**  
An intelligent central hub for IoT devices



**USM-300 Series**  
**Scalable Edge AI Computer**  
Image/video capture and processing for hybrid ORs



**USM-500 Series**  
**Edge AI Workstation**  
An edge workstation for AI inference, AI-assisted, 3D rendering



# Medical Imaging


## Integrated IP-Based Solution for Operating Rooms

IP-based video streaming systems capable of handling high-quality imaging and real-time video from multiple sources are crucial for enabling centralized OR management and remote medical training/collaboration.




PAX-1 Series Clinical Displays

PAX-3 Series Surgical Displays

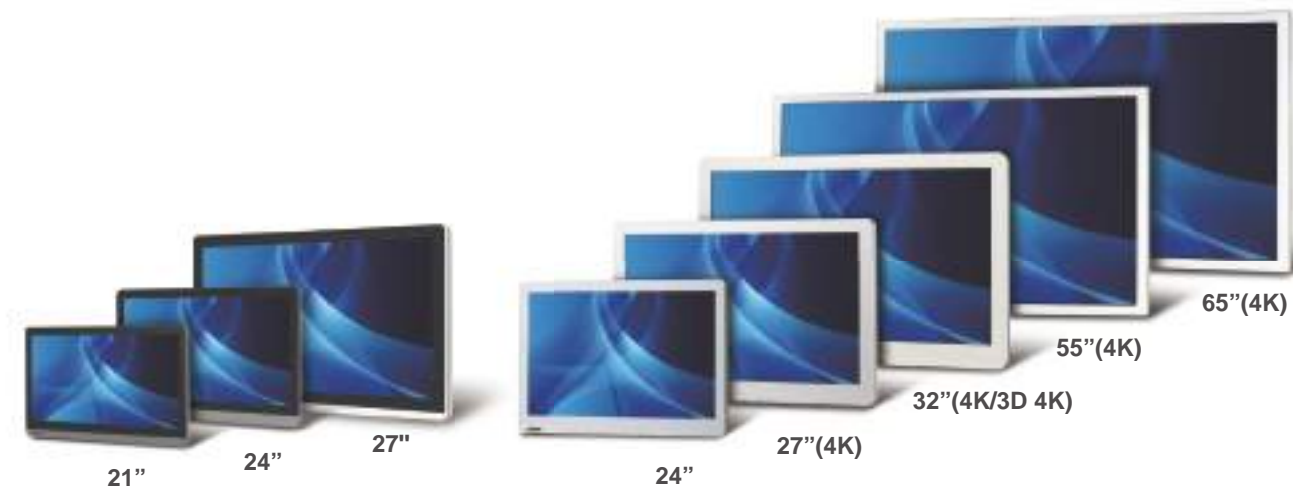

## Digital Operating Room Solution

### Video System Integration

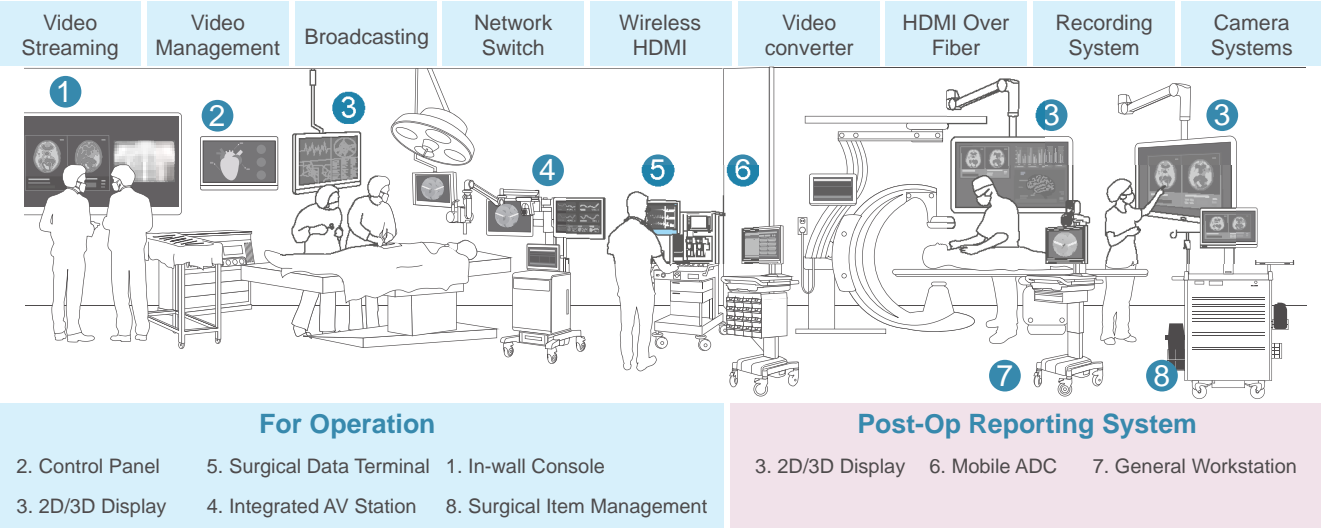

## Integrated IP-Based Solution

### AVAS Series



#### AVAS-200 Series

##### Video Encoders and Decoders

IP-based data transmission system with a single-cable distribution architecture.



#### AVAS-400 Series

##### Video Recorders

Integrated imaging hub equipped with software development APIs for customizing video and imaging streams.



#### AVAS-60 Series

##### Video Mobile Workstation

Mobile workstation for conducting surgical demonstrations and consultations.



#### AVAS-800 Series

##### In-Wall Streaming Console


A large screen in-wall streaming console perfect for digital OR applications



## PAX-3 Surgical Displays Key Features



Touch/AG/AR Coating



BT2020 Compatible and > 94% NTSC



Up to 3D@ 4K



DICOM or Gamma 2.2



Imaging Configuration



Support Endoscopy/ Mirror Effect, etc.



Optical Bonding (optional)



12G SDI @ 4K Single/Quad

\*These features focus on the PAX-3

\*More detail please refer to datasheet

## Customized Displays

Medical-grade power adapter with EFT Immunity

Plastic insulation layer with ESD & EMI Protection+

Multi-layer PCBA with ESD & EMI Protection+

I/O cover to reduce risk of ESD events

Ranging from 12" to 65", flexible for both clinical and surgical use, offering comprehensive medical display solutions.



# Specialty Medical Equipment and Devices

Advantech's medical-grade products streamline time-to-market by adhering to industry regulations. Customizable for specific applications, our healthcare solutions support a wide range of medical specialties. As a design partner for medical customers, we provide integrated development services, ensuring certification compliance throughout the product lifecycle. For next-generation healthcare, we offer customization to accelerate AI adoption. Additionally, through strategic change management, Advantech ensures stable production for extended lifecycles.



**Medical  
Certification**



**Flexible  
Customization**



**RDT/HALT Test  
for Reliability**



**Comprehensive  
Computing Platform**



**Early Access  
Design**



**World-Class Quality  
Assurance**

## Surgical Navigation



## Laboratory Analyzer

A clinical laboratory analyzer is used in hospital and clinical laboratories to run automated biochemical tests to detect the presence and concentration of substances in samples.



## Intraoral Scanner

An intraoral scanning system is used to acquire oral data, display real-time 3D rendering, design, and produce 3D models for caregivers to facilitate diagnostics and outpatient services.



**Point-of-Care  
Terminal & Medical  
Display**


**Point-of-Care Terminal**



## Medical Computer, Cart & Display


### Robotic Surgery

An IP nurse call system is a communication and management system equipped with IP technology for hospitals, clinics, nursing homes, and all other healthcare institutions.

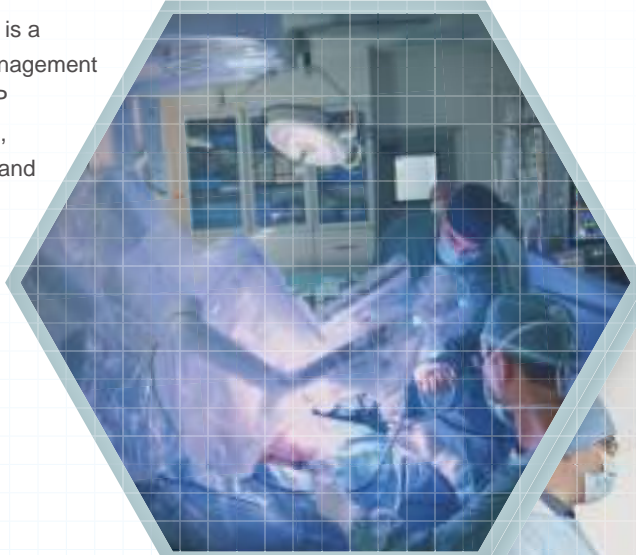

### Endoscopy

An endoscopy is a procedure to examine the inside of a person's body using an endoscope.

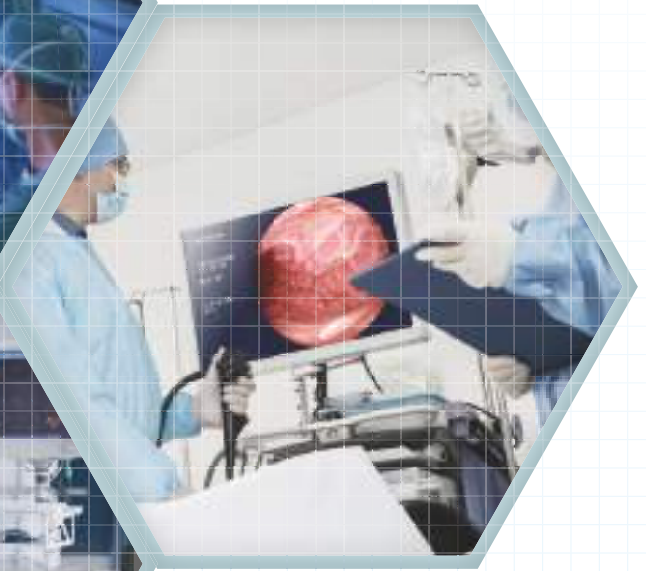

## Medical Computers & Displays

### OR/ICU Devices

The combo module for point-of-care terminals features a 4K camera and sound bar, which enables clinicians and ICU staff to consult on patient care remotely.

## Medical Carts & Point-of-Care Terminals



### C-Arm Machine

A C-arm machine is a piece of medical imaging equipment that operates on the basic principle of X-ray technology. This fluoroscopy device is used to visualize patient anatomy in the operating room during surgery.

# Medical Tablets

The Advantech AIM Medical Tablet enhances healthcare mobility, offering real-time data access, secure communication, and detailed imaging in a compact, portable design. With powerful processing and a large battery capacity, it ensures healthcare professionals can deliver timely, accurate care anywhere.



intel

Qualcomm



## AIM Series

### Security & Safety




Certified



Windows 11

Win10/11 LTSC



Security



Connectivity

**DeviceOn**

Remote Device  
Management Software

### Portability & Durability



- Ease of cleaning and disinfection



- Drop Tolerance
- IP65-Rated Protection



- Vivid Display
- Glowe-Compatible Touchscreen



- Extended Product Lifecycle

### Application-Oriented Peripherals



Streamlined care with  
**VESA Dock**



Medical Imaging with  
**DESK Dock**



Mobile portability with  
**Kickstand**



Versatile application with  
**Add-on Module**



# iHospital Solutions

The iHospital solutions from Advantech facilitate the integration of various healthcare systems and technologies, enabling efficient data flow and communication. This integration helps streamline workflows, reduce errors, and ultimately improves the overall quality of patient care.

Advantech's iHospital solutions are innovative offerings that include intelligent ward solutions, intelligent outpatient services, a real-time location system, as well as a centralized hospital management center to enable the realization of intelligent hospitals. These solutions can be rapidly deployed in diverse facilities to increase service efficiency and facilitate the provision of high-tech, patient-centered care.

## Nursing Applications

- iWard

## Ambulatory

- iOutpatient

## Perioperative Systems

- iVideOR

## Ancillary Department Systems

- RTLS
- ColdChain
- IoT Sensing

## Energy Management

- iEMS

*"The Advantech iWard solution for information integration improves immediacy of use. It also improves medical personnel work efficiency, and enables patients to receive better medical care through intelligent work practices."*

**Chiu-Asiang Lee,**  
Deputy Dean of the Nursing Department  
at Chung Shan Medical University Hospital



**iVideOR**



**RTLS**



**iWard**



**iOutpatient**



**ColdChain**

*"Advantech is a great choice;  
they have enthusiastic and professional staff. We are now  
an outstanding hospital thanks to their intelligent solutions."*

**Pham Viet Thai,**  
Investor in Thai Hoa Hospital.



**iEMS**



**IoT Sensing**

# iOutpatient Solutions

Advantech's iOutpatient solutions comprise an information signage and queue management platform that can be integrated with hospital information systems (HIS) and patient check-in data to guide patients toward a satisfactory journey.

## Key Features


- Integrated portal for managing signage displays and patient queuing system
- Enables monitoring and analysis for valuable insights that improve operational efficiency



# IoT Sensing & Cold Chain Solutions

## Key Features

- Ensuring pharmaceutical safety with IoT sensing and cold chain management LEO-S592-AQ integrated with multiple sensors: humidity, temperature, CO2, Brightness, PM2.5, PM10, HCHO.
- LEO-S552-TH temperature and humidity sensor can real-time monitor optimal temperatures for vaccines and sensitive drugs

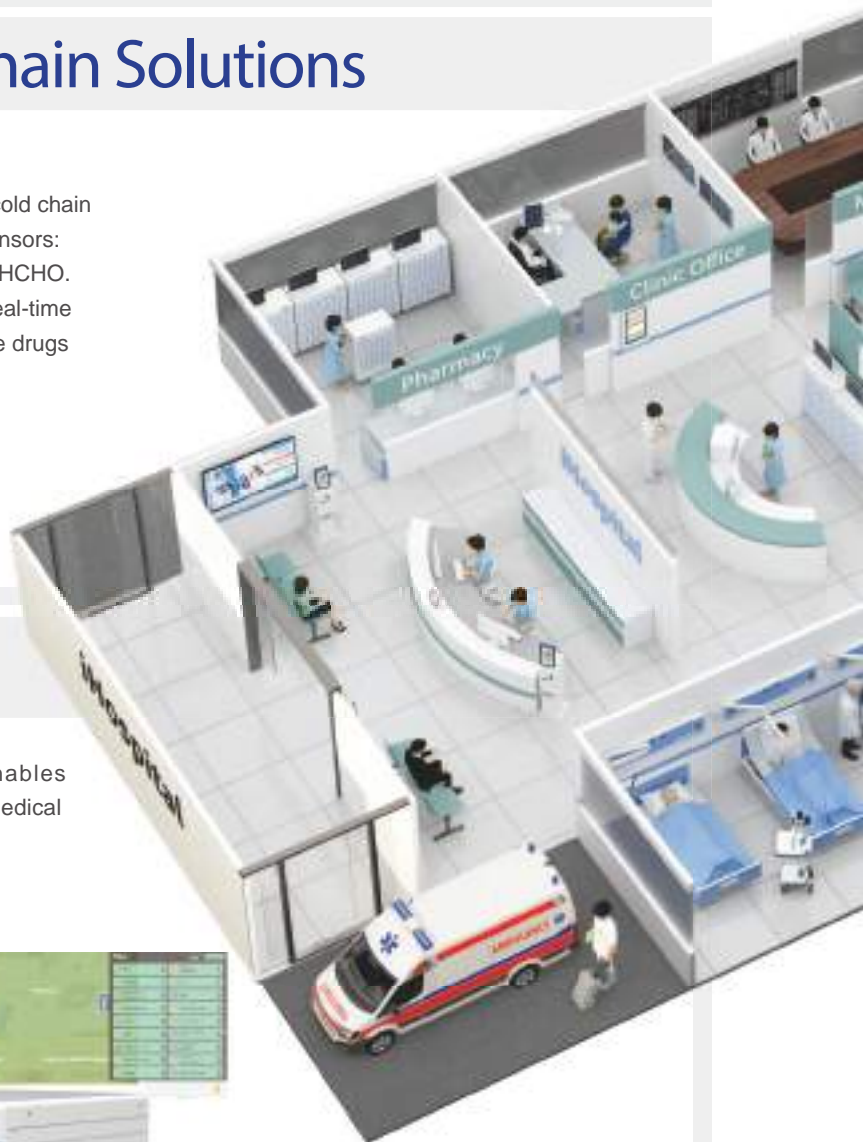

# RTLS Solutions

Advantech's real-time location system (RTLS) enables convenient location tracking and status monitoring of medical equipment, staff, and patients.

## Key Features

- People tracking
- Equipment positioning
- Bluetooth low energy (BLE) / Infra-Free Wi-Fi
- Dwell time analysis
- Real-time notifications





# iEMS Solutions

One-stop, low carbon, & digital transformation solutions

## Key Features

- Smart ISO-compliant carbon & energy management
- AI empowered intelligent machines & facilities management
- HVAC/Compressor systems management & AI controlling energy saving
- Gen AI knowledge database creation & services



# iVideOR Solutions

iVideOR is designed to simplify the medical video management process, iVideOR allows healthcare professionals to livestream surgeries, record procedures, and manage captured video data from a centralized location.

## Key Features

- Maximize operating room efficiency
- DICOM support
- Convenient cross-platform data access
- Real-time communication and content sharing



# iWard Solutions

Featuring high configuration flexibility and an intuitive user interface, iWard solutions facilitate the provision of clear information and interactive patient education for increasing patient engagement and optimizing healthcare outcomes.

## Key Features

- Standardized for rapid deployment
- Flexible configuration for diverse departments
- High extensibility for easy integration
- Medication management enhances the safety and efficiency.



# Application Stories

## Benelux Hospital Adopts Point-of-Care Terminals to Establish a Patient Data Management System



Netherlands

Benelux Vitaal B.V., a Dutch hospital, wanted to improve bedside care in intensive care units (ICUs) and critical care units (CCUs) by implementing a patient data management system (PDMS). A PDMS provides medical staff with instant access to all treatment data, test results, and patient information at the point of care. Moreover, it improves nursing workflows by simplifying documentation and data validation. Advantech's medical-grade point-of-care (POC) terminals were adopted to establish a PDMS that could be integrated with electronic medical records (EMRs). Certified to medical safety standards, the terminals are ideal for deployment in various settings, including operating rooms, critical care units, and specialty departments. For Benelux, realizing a PDMS with POC terminals, particularly in intensive care units, provided a convenient solution for delivering high-quality, patient-centric care directly at the point of service.



## OrthoGrid Reshapes Orthopedic Procedures with AI-Powered Platform



United States

OrthoGrid's AI applications tackle key orthopedic surgery challenges by correcting fluoroscopic distortion, interpreting images, and providing real-time feedback to surgeons, enhancing performance without added costs. Their deep learning AI algorithms are optimized for surgeries like total hip replacement and trauma, offering automated assistance to make procedures more efficient and accurate.

To support real-time AI execution, OrthoGrid uses Advantech's USM-500, a medical-grade computer with a 9th Gen Intel® Core™ processor and NVIDIA® Quadro RTX™ 4000 GPU. Its dual video capture cards allow for rapid processing of large fluoroscopy images, meeting strict medical standards.





## Digitizing ORs at Erasmus University Hospital with 4K Ultra HD Lossless Video-over-IP Solutions



Netherlands

Erasmus University Hospital in Rotterdam is the largest hospital in the Netherlands. To upgrade their facilities, the hospital wanted to implement digital operating rooms (ORs) equipped with multimedia video streaming solutions. Advantech, together with partners INTER and Technolution, helped develop and implement video streaming solutions in the hospital's 26 operating rooms. The solution was designed to optimize the OR workflow by allowing medical staff to access all data relevant to the operation, such as patient information, imaging results, and treatment videos, from a single centralized platform during each stage of the operation. Moreover, video streams can be shared between ORs and broadcasted to different hospitals and lecture rooms for remote consultation and doctor training. In terms of design, the solution was based on Technolution's SigmaXG video-over-IP technology, which supports low-latency 4K ultra HD video streaming. Advantech's surgical monitors equipped with an NDcoder were also deployed. Finally, INTER's ORflow platform was installed in all ORs. The solution provides doctors convenient access to perioperative information and enables administrators to easily record videos for telemedicine or educational purposes.



## Enhancing Patient Care with Advantech HIT and DeviceOn-iService Suite at Iseikai International General Hospital



Japan

Pers Japan, specializing in bedside equipment and IT solutions, collaborated with Advantech to equip Iseikai International General Hospital with over 530 HIT-W101 bedside information terminals. By integrating Advantech's DeviceOn-iService suite, the hospital now benefits from real-time hardware and app monitoring, scheduled power management, OTA dispatch, and remote OS settings. These innovations have significantly reduced maintenance costs and enhanced the efficiency of the hospital's IT team, supporting the hospital's mission to integrate advanced technology and improve patient care.





## Advantech AIoT Application Story - Vietnam Thai Hoa Hospital



To address medical resource shortages and enhance service quality, Thai Hoa Hospital partnered with Advantech to build Vietnam's first smart hospital. Despite modern equipment and skilled staff, outdated patient management software hindered operations. By integrating Advantech's intelligent solutions, including advanced data systems and telehealth technologies, the hospital improved patient satisfaction, operational efficiency, and reduced costs. These innovations, such as iWard terminals and the AVAS solution, have revolutionized patient care and positioned Thai Hoa Hospital as a leader in the smart healthcare era, ensuring sustainable growth and advanced medical services.



## Optimizing Cerebral Oximetry in Cardiovascular Surgery with Advantech Tablets



Advantech stands at the forefront of near-infrared spectroscopy (NIRS) technology for cardiovascular surgeries. Our portable devices, equipped with customizable interfaces, seamlessly integrate into existing medical setups, optimizing perioperative workflow. Continuous monitoring of cerebral oxygenation enables clinicians to detect and address issues promptly, enhancing patient outcomes. Beyond clinical benefits, Advantech's solutions are designed for practicality and durability, with a compact and rugged build ideal for the demanding environment of the operating room. By partnering with Advantech, healthcare providers can elevate their capabilities in cardiovascular surgeries, ensuring reliable performance and improved patient care.



## Pingtung Veterans General Hospital Optimizes Medication Management with Advantech's eMedication Solution



Taiwan

Medications are traditionally dispensed manually. This requires multiple staff verifications and is taxing on human resources. Pingtung Veterans General Hospital chose to optimize medication management by delegating some tasks to intelligent technology. This frees up resources and ensures medication safety by decreasing the risk of human error. In this case, the hospital adopted Advantech's eMedication Solution — which comprises of the AMiS-810 RFID Bin Setting Station, the AMiS-830 UD Medication Cart, the AMiS- 850T Compact Automated Dispensing Cabinet, the AMiS-850C Medication Cart, and iMedication Software. This combined solution enables secured, closed-loop medication management — from the pharmacy to bedside administration.



## Optimizing Work Efficiency with Advantech Nursing Cart with Medication Box for Emergency Room Clinical Use



Vietnam

Vinmec Times City International Hospital is the first general hospital in Vietnam to achieve Joint Commission International (JCI) accreditation, a prestigious global standard recognized in over 90 countries. This accreditation highlights Vinmec's dedication to maintaining high international standards in quality management and patient safety.

To enhance efficiency in emergency room workflows, Vinmec is implementing Advantech's AMiS-30EM mobile nursing station, which features a medication box. This powered medical cart allows for one-button height adjustment, improving comfort for clinicians. Its adaptable design accommodates various accessories, thus optimizing clinical efficiency and patient care in busy hospital environments

# Product Selection Guide

## POC-4 Multimodal Point-of-Care Terminals



		POC-424 Standard Model	POC-421 Standard Model	POC-424 Battery Model	POC-421 Battery Model
System	Processor*	Intel® Core™ U5-125U 12 cores, 12M Cache, up to 4.3 GHz Intel® Core™ U7-155U 12 cores, 12M Cache, up to 4.8 GHz		Intel® Core™ U5-125U 12 cores, 12M cache, up to 4.3 GHz Intel® Core™ U7-155U 12 cores, 12M cache, up to 4.8 GHz	
	Memory (Default)	Memory (default) 16GB DDR5 (supports up to 32GB DDR5 SODIMM)	Memory (default) 16GB DDR5 (supports up to 32GB DDR5 SODIMM)	Memory (default) 16GB DDR5 (supports up to 32GB DDR5 SODIMM)	Memory (default) 16GB DDR5 (supports up to 32GB DDR5 SODIMM)
	Operating System (Optional)	Windows 10 IoT 2021 Ent, Windows 11 IoT 24H2 Ent, Windows 11 Pro TW/UK/USA	Windows 10 IoT 2021 Ent, Windows 11 IoT 24H2 Ent, Windows 11 Pro TW/UK/USA	Win 10 IoT Ent LTSC 2021, Win 11 IoT Ent LTSC 2024, Linux (supported upon request)	Win 10 IoT Ent LTSC 2021, Win 11 IoT Ent LTSC 2024, Linux (supported upon request)
Storage	Primary Storage	NVMe SSD (M.2 2280)	NVMe SSD (M.2 2280)	NVMe SSD (M.2 2280)	NVMe SSD (M.2 2280)
Display	Size	23.8 in	21.5 in	23.8 in	21.5 in
	Max. Resolution	1920 x 1080		1920 x 1080	
Touch	Type	10-point multi touch P-CAP (clear glass)		10-point multi touch P-CAP (clear glass)	
I/O	USB 3.2 Gen 1 (Type-A)	4		4	
	USB 3.1 Gen 1 (Type-C)	1		1	
	HDMI	1		1	
	LAN 1.5KV-isolation	2		2	
	Mic-In/ Line-Out	1		1	
	COM (RS232)	1		1	
iDoor		-		Choose one of either 4KV idoor (1COM+2USB) / 4KV idoor (1LAN) / 1.5KV idoor (1COM)	
Expansion Slots	M.2 2230 E-Key	1 (for Wi-Fi/Bluetooth module)		1 (for Wi-Fi/Bluetooth module)	
Other Functions	Speaker	2 x 2W speakers		2 x 2W speakers	
	Camera	1 x 5 megapixel (optional)		1 x 5 megapixel (optional)	
	Book Light	1		1	
	TPM 2.0	2.0 (default chip)		2.0 (default chip)	
Power Input	DC/AC	DC 19V, max. 150W		DC 19V, max. 150W	
IP Rating	Front Panel	IP65		IP65	
	System	IP54		IP43	
Authentication Solution (Choose 1)	RFID Reader	Optional (choose either RFID or smart card reader)		Optional (choose either RFID or smart card reader)	
	Smart Card Reader**	Optional (choose either RFID or smart card reader)		Optional (choose either RFID or smart card reader)	
Battery Solutions	Backup Battery	-		20W (Optional)	
	Hot-Swap Power System	-		2 x 140W (Optional)	
	Charging in POC-4	-		AC in with low loading condition: all batteries to 100%	
	Charging in charging station	-		2 slots: Charging time < 2 hours from 20% to 80%	
Certifications	EMC & Safety	Medical CE, FCC (IEC 60601-1-2, 4.1st edition),		Medical CE, FCC (IEC 60601-1-2, 4.1st edition)	
Physical Characteristics	Dimensions (W x H x D)	583 x 387 x 63 mm/ 22.95 x 15.2 x 2.48 in	524 x 357 x 58 mm/ 20.63 x 14.06 x 2.28 in	583 x 387 x 88 mm/ 22.95 x 15.2 x 3.5 in	524 x 357 x 88 mm/ 20.63 x 14.06 x 3.49 in
	Weight	7.78 kg/17.15 lb		9.18 kg/20.24 lb	7.69 kg/16.95 lb
	VESA Mount	100 x 100; 75 x 75 mm		100 x 100; 75 x 75 mm	
Environment	Operating Temperature	0 ~ 35°C / 32 ~ 95°F		0 ~ 35°C / 32 ~ 95°F	
	Storage Temperature	0 ~ 50°C / 32 ~ 122°F		0 ~ 50°C / 32 ~ 122°F	
Warranty	System	3 years		3 years	



## POC-6 Point-of-Care Terminals



		POC-615	POC-621	POC-624
System	Processor*	Intel® Core™ i7-1185G7E (12M cache, up to 4.40 GHz) Intel® Core™ i5-1145G7E (8M cache, up to 4.10 GHz)		
	Memory (Default)	8GB DDR4 (supports up to 64GB DDR4 SODIMM)	DDR4 (supports up to 64GB DDR4 SODIMM)	
	Operating System (Optional)	Windows 10 IoT Enterprise (64 bit), Linux (support upon reques		
Storage	Primary Storage (Default)	NVMe SSD (M.2 2280)		
	Secondary Storage (Optional)	2.5" SATA SSD available	2.5" SATA SSD available (choose either 2.5" SSD or backup battery)	2.5" SATA SSD available
Display	Size	15.6 in	21.5 in	23.8 in
	Max. Resolution	1920 x 1080 Full HD		
Touch	Type	10-point P-CAP multi touch (clear glass); (optional AG/AR support upon request)		
I/O	USB 3.2 Gen 2 (Type-A)	4		
	USB 3.2 Gen 2 (Type-C)	1 (with display function/ MAX 5 V, 1.5A power output)		
	USB 2.0 (Type-A)	-	2	
	HDMI	1		
	LAN isolation, 1.5KV	2		
	Mic-In/ Line-Out	-	1/1	1/1
	COM (RS232) 1.5KV	1	1	2
Expansion Slots	PCIe x4	1 (card length: 167.65 mm/6.6 in Max)	1 (card length: 167.65 mm/6.6 in Max)	1 (card length: 167.65 mm/6.6 in Max)
	M.2 2230	1 (for Wi-Fi/Bluetooth modules)	1 (for Wi-Fi/Bluetooth modules)	1 (for Wi-Fi/Bluetooth modules)
	Mini PCIe	1 (full size)	1 (full size)	1 (full size)
Other Functions	Speaker	2 x 2W	2 x 2W	2 x 2W
	LED Book Light	2	2	2
	Camera	1 x 5 megapixel (optional)	1 x 5 megapixel (optional)	1 x 5 megapixel (optional)
	TPM 1.2/2.0	2.0 (default via fTPM –Firmware TPM)	2.0 (default via fTPM –Firmware TPM)	2.0 (default via fTPM –Firmware TPM)
Power Input	DC/AC	19V, max. 150W	DC model: 19V, max. 150W/AC model: 100 ~ 240V, max. 250W (choose either DC or AC model)	DC model: 19V, max. 150W/AC model: 100 ~ 240V, max. 250W (choose either DC or AC model)
IP Rating	Front Panel	IP65		
	System	IP43	IP54	IP54
	RFID Smart Card Reader	Optional (choose either RFID or Smart Card)		
Battery Solutions (Choose 1)	Backup Battery	Optional (choose either 1 backup battery or PCIe x4)		
	Hot-Swapping Battery Module	Not applicable	optional (choose either backup battery or battery module)	optional (choose either backup battery or battery module)
Certification	EMC & Safety	Medical CE, FCC (IEC 60601-1-2, 4th edition) EN 60601-1 Compliance	Medical CE, FCC (IEC 60601-1-2, 4th edition) EN 60601-1 Compliance	Medical CE, FCC (IEC 60601-1-2, 4th edition) EN 60601-1 Compliance
Physical Characteristics	Dimensions W x H x D	406 x 274 x 61 mm/15.98 x 10.79 x 2.4 in	524 x 357 x 62 mm/20.63 x 14.06 x 2.44 in	583 x 387 x 68 mm/22.95 x 15.2 x 2.68 in
	VESA Mount	100 x 100; 75 x 75 mm	100 x 100; 75 x 75 mm	100 x 100; 75 x 75 mm

\* Intel® Celeron® processor available upon request

\*\* If backup battery is chosen for POC-621, neither 2.5" SSD nor battery module can also be installed

## Accessories for POC-6

(Only available for  
21" and 24" models)



Battery Module	
Battery Type	Lithium-ion battery
Battery Capacity	90W
Total Capacity	180W (2 x batteries, 90W per battery)
Battery Runtime	6 ~ 8 hours
Battery Lifespan	300 cycles >= 70%
LED Indicator	LED indicator with button
Weight	1.8 kg/1.1 lb

# Product Selection Guide

## POC-8

### Medical Edge AI Point-of Care Terminals



		POC-821	POC-824
Computing System	CPU	Intel® Core™ i9-13900E Processor, 24 Core, 1.8GHz (36M Cache, up to 5.20 GHz) Intel® Core™ i7-13700E Processor, 16 Core, 1.9GHz (24M Cache, up to 5.10 GHz) - Default Intel® Core™ i5-13500E Processor, 14 Core, 1.5GHz (24M Cache, up to 4.60 GHz)	
	Memory	Support DDR5 Memory up to 64GB (ECC support optional)	
	Operating System	Windows 10 IoT / Windows 11 IoT / Linux (Supported upon request) 64-bit only	
Storage	Primary Storage	Supports NVMe M.2 SSD (up to 2TB)	
	Secondary Storage (Optional)	Supports 2.5" SATA SSD (up to 1TB)	
Display	Size	21.5 / 23.8 in	
	Max. Resolution	1920 x 1050 Full HD	
Touch	Type	Projected Capacitive 10-points (Clear Glass). (AG/AR support by request)	
Graphic	MXM Graphic Module (Optional)	NVIDIA A2000 (8GB) or A4500 (16GB) MXM MSH mode module	
I/O ports	DC-In	1	
	USB 3.2 Type-A	4	
	USB 3.2 Type-C	1 x (with display function / DP ALT mode, 10 Gbps, Max.5V 3A power output)	
	HDMI 2.0	1	
	LAN ( Isolation 1.5 KV)	2	
	Line-Out	1	
	Mic-in	1	
Expansion Slots	COM (RS-232) (Isolation 1.5KV)	1	
	PCIe x16	x1 (Max. card length 167.65mm, single deck / Max. power consumption 10W)	
	PCIe x4	1 (Max. card length: 167.65 mm / 6.6 in; single deck)	
	M.2 2280	1 (for NVMe M.2 SSD primary storage)	
	M.2 2230	1 (for Wi-Fi/ Bluetooth module)	
Other Functions	Speaker	2 x 2W	
	Camera (Optional)	5M pixel camera available	
	TPM	2.0	
Power Input	DC	DC input 24V ( Adaptor 100~240V/AC, Max. 300W)	
IP Rating	Front Panel	IP65	
Authentication Solution	RFID (Optional)	Module as option available	
Certification	EMC & Safety Certificate	Medical CE, FCC	
		Medical, IEC 60601-1 Compliance (MDR)	
		UL 60601-1	
		CCC	
Physical Characteristics	Dimensions (W x H x D)	523.7 x 356.7 x 57 mm (20.62 x 14.04 x 2.24 in)	583.38 x 386.74 x 59.95 mm (22.97 x 15.23 x 2.36 in)
	VESA Mount	100 x 100, 75 x 75 mm	100 x 100, 75 x 75 mm
	Weight	7 kg (15.43 lb)	7.9 kg (17.42 lb)
Environment		Operating Temperature : Operating: 0 ~ 35°C Storage Temperature: 0 ~ 50°C	
Warranty		System: 3 years	

# HIT

## Healthcare Information Terminals



		HIT-312	HIT-315	HIT-507	HIT-512	HIT-515	HIT-518
System	Processor	Rockchip RK3399		Intel® Atom® Apollo Lake J3455	Intel® Celeron® J3455	Intel® Atom® Alder Lake N(N50/N97/N305) *	
	Memory	1 x 4GB DDR4		4GB DDR3L (up to 8GB)		8GB DDR3L (up to 16GB)	
	Storage	32G eMMC		1 x M.2 2242 SSD (up to 1TB)		1 x M.2 2242 SSD (up to 1TB)	
	Camera	2MP CMOS (optional)		5 Megapixel (optional)	2 Megapixel (optional)	5 Megapixel (optional)	
Display	Size	11.6" (16:9)	15.6" (16:9)	7"	11.6" (16:9)	15.6" (16:9)	18.5" (16:9)
	Max. Resolution	1920 x 1080	1920 x 1080	1024 x 600	1366 x 768	1920 x 1080	1920 x 1080
	Brightness	300 cd/m²	300 cd/m²	400 cd/m²	250 cd/m²	300 cd/m²	350 cd/m²
	Contrast Ratio	800:1	700:1	800:1	500:1	700:1	800:1
Touchscreen	Type	Projected capacitive		Projected capacitive		Projected capacitive	
I/O Ports	USB	2 x USB 2.0 (Side) 1 x Type-C DC in, 1 x Micro USB for debug		2 x USB 3.0		1 x USB 3.0 (rear), 2 x USB 2.0	
	COM	-		1		Yes (optional)	
	HDMI	-		1		-	
	Smart Card Reader	-	-	-	1 (optional)	1 (optional secondary reader)	
	RFID	Yes (optional)		Yes (optional)		Yes (optional)	
	SD Card Reader	-		-		-	
Audio	Speaker	2 x 2W		1 x 2W	2 X 2W	2 x 3W	
	Internal Microphone	1		1		1	
Network	LAN	1 x RJ-45 (10/100/1000 Mbit), including 1 with optional PoE+		1 x RJ-45 (10/100/1000 Mbit) with optional PoE+		2 x isolated RJ-45 (10/100/1000 Mbit), including 1 with optional PoE+	2 x isolated RJ-45 (10/100/1000 Mbit)
	WLAN	802.11 a/b/g/n/ac/ax, Bluetooth 5.2		802.11 a/b/g/ac, Bluetooth 4.1		802.11 a/b/g/n/ac/ax, Bluetooth 5.2	
Software	Operating System	Android 10/14(2025/Q1) (Linux by request)		Windows 10 IoT LTSC, Android 12 (Linux by request)		Windows 11 IoT, Android 14 (Linux by request)	
Function Keys	Hotkey	1 x Power button		1 x Power button		6 x Function key	
Nurse Call Button	Hotkey	-		-		1	
Emergency Alarm	LED Indicator	1 (optional)	1 (optional)	1	1 (optional)	1 (optional)	1 (optional)
Mechanical IP Rating Certifications Power Supply Accessories (Optional)	Mount Options	VESA 100 x 100		VESA 75 x 75		VESA 75 x 75/100 x 100	
	Dimensions (W x H x D)	294.4 x 198.3 x 24.2(27.0) mm/ 11.59 x 7.81 x 0.95 (1.06) in	382.4 x 248.3 x 22.2(25.0) mm/15.06 x 9.78 x 0.87(0.98)	193.3 x 140.9 x 37 mm/ 7.61 x 5.54 x 1.45 in	296 x 190 x 33.4 mm/ 11.65 x 7.48 x 1.31 in	400.1 x 273 x 43 mm/ 15.75 x 10.74 x 1.69 in	466.4 x 311.5 x 43 mm/ 18.36 x 12.26 x 1.69 in
	Weight	1.2 kg/2.64 lb	1.5 kg/3.3 lb	1 kg/2.2 lb/1.2 kg/2.64 lb		3.2 kg/7.05 lb	3.9 kg/8.59 lb
	Front Panel	IP65		IP65		IP65	
	Whole System	IPX3 (as IO downside)		-		-	
	EMC & Safety	Medical CE, FCC (IEC 60601-1-2, 4th edition) EN 60601-1 Compliance UL 60601-1 CCC		Medical CE, FCC (IEC 60601-1-2, 4th edition) EN 60601-1 Compliance IEC 62368, UL, CCC		Medical CE, FCC (IEC 60601-1-2, 4th edition) EN 60601-1 Compliance UL 60601-1 CCC	
	Input Voltage			100 ~ 240VAC, 1.1 ~ 0.45A @ 47 ~ 63 Hz		100 ~ 240VAC, 1.1 ~ 0.45A @ 47 ~ 63 Hz	
	Output Voltage	Medical: 15VDC 3A, USB-C		ITE/medical 12VDC, 3A		Medical 18~19VDC, 3.42A	
	Handset	-		Yes (via add-on module)		Yes (via add-on module)	
	MSR	-		-		Yes (optional)	
	Arm Support	Wall/ceiling mounted		Wall mounted		Wall/ceiling mounted	
	Table Stand	Yes		Yes		Yes	



# Product Selection Guide

**USM**

**Medical Edge AI  
Computers**



		USM-500	USM-500 IGX	USM-300	USM-100
System	Processor	Intel 14th Gen Processor (3/5/i7 TDP 65W)	12-core Arm® Cortex® -A78AE v8.2 64-bit CPU 3MB L2 + 6MB L3	Intel 13th Gen Processor (3/5/i7 TDP 65W)	Intel 12th Gen Processor (5/i7)
	Memory	4 slots U-DIMM sockets support up to 128GB DDR5 4800MHz	64GB 256-bit LPDDR5	2 slots SO-DIMM sockets support up to 64GB DDR5 4800MHz	8GB DDR5 (supports up to 32GB DDR5 SODIMM)
	Operating System	Windows 10 LTSC/ 11 Linux and windows 2021 server (By project base)	Linux/Redhat	Windows 10 LTSC/ 11 Linux and windows 2021 server (By project base)	Win10 LTSC, Win 11 Pro, Ubuntu 20.04
Storage	Storage	2.5" SATAIII 5KRPM 128M up to 2TB	2.5" SATAIII 5KRPM 128M up to 2TB	2.5" SATAIII 5KRPM 128M up to 2TB	NVMe M.2 SSD 256GB (Max. support 2TB)
I/O	HDMI	1	-	1	1
	DisplayPort	2	1		
	LAN	4	4	2	2
	RS232	1	-	1 (optional)	1
	USB	12 (7 x USB 3.2 Type-A (2 front, 5 rear)/1 x USB 3.2 Type-C/4 x USB 2.0 Type-A)	5 ( 4 x USB 3.2 Type-A/1 x USB 3.2 Type-C)	7 (4 x USB 3.2 Type-A (rear)/1 x USB 3.2 Type-C(rear)/2 x USB 2.0 Type-A (front))	5 (4 x USB 3.1 Gen2 (Type-A)/ 1 x USB 3 Type-C)
	Audio	3 (Line-in/Line-out/Mic-in)	2 (Line-out/Mic-in)	2 (Line-in /Line-out)	
	Reset	-	-	-	-
	DC/AC	AC 100~240V, 900W	AC 100~240V, 900W	AC 100~240V, 360W	
	Power Indicator	Power Button	Power Button	Power Button	Power Button
	HDMI	1 x HDMI 2.0a	-	1 x HDMI 2.0a	1 (supports 4K)
	DisplayPort	2	1		
	eDP	1	-		
Network	BlueTooth		Optional Bluetooth 5.3		BT5.3 (option)
	WLAN		Optional Wi-Fi 6		
	RJ-45	4	4	2	
	M.2	2	2	2	
	PCIe x1	-	-	-	
	PCIe x4	4GB/s per direction	-	4GB/s per direction	
	PCIe x8	8GB/s per direction	1		
	PCIe x16	16GB/s per direction	1	16GB/s per direction	
	Other	-	-	-	-
Physical Characteristics	Dimensions (L x W x H)	320 x 329.5 x 145 mm	320 x 329.5 x 145 mm	270 x 305 x 100/50 mm	169.5 x 230.6 x 43 mm
	Weight	10 kg	10 kg	7 kg	1.5 kg
	Mounting	-	-	-	-
Power Input/Output	DC/AC	Input Voltage: internal PSU 100-240V 8-4A 60-50 Hz, maximum output power 900W Output Voltage: +3.3, 20A; +5V 20A; +12V1, 16A; +12V2, 16A; +12V3 16A; +5Vsb, 3A; -12V, 0.5A; -5V, 0.2A	Input Voltage: internal PSU 100-240V 8-4A 60-50 Hz, maximum output power 900W Output Voltage: +3.3, 20A; +5V 20A; +12V1, 16A; +12V2, 16A; +12V3 16A; +5Vsb, 3A; -12V, 0.5A; -5V, 0.2A	Input Voltage (TBD): internal PSU 100-240V 8-4) 47~63 Hz, maximum output power 360W	96W, DC:12V, LOCK PLUG, Medical grade
Environment	Operating Temperature	0 ~ 35°C (32 ~ 95°F)	0 ~ 35°C (32 ~ 95°F)	0 ~ 35°C (32 ~ 95°F)	0 ~ 35°C (32 ~ 95°F)
	Storage Temperature	-40 ~ 70°C (-40 ~ 156°F)	-40 ~ 70°C (-40 ~ 156°F)	-40 ~ 70°C (-40 ~ 156°F)	-40 ~ 70°C (-40 ~ 156°F)
Certifications	EMC & Safety	Medical CE, FCC, EN 60601-1 Compliance, UL 60601-1	Medical CE, FCC, EN 60601-1 Compliance, UL 60601-1	Medical CE, FCC, EN 60601-1 Compliance, UL 60601-1	Medical CE, FCC, EN 60601-1 Compliance, UL 60601-1
Warranty		2 years	2 years	2 years	2 years

# PAX-1

## Medical Displays

### -Clinical Series



		PAX-121(M & F model)	PAX-124(M & F model)	PAX-127
LCD	Screen Size	21.5"	23.8"	27"
	Resolution	1920 x 1080	1920 x 1080	1920 x 1080
	Aspect Ratio	16:09	16:09	16:09
	Pixel Pitch	0.82 x 0.24 mm	0.27 x 0.27 mm	0.31x 0.31 mm
	Viewing Angle	178°/ 178°	178°/ 178°	178°/ 178°
	Contrast Ratio	1000:1	1000:1/3000:1	1000:1
	Native Luminance (Type)	250 cd/m²	250/350 cd/m²	300 cd/m²
	Color Depth	16.7M (6-bit + A-FRC)	16.7M (8-bit)	16.7M (8-bit)
	Display Mode	Transmissive Mode, Normally black	Transmissive Mode, Normally black	IPS
	Response Time	14 ms (Typ, on/off)	15 ms (Tr + Tf)/16 msec (Typ, G/G)	14 ms (Tr + Tf)
	Touch Screen	PCAP (optional)	PCAP (optional)	PCAP (optional)
Input	DP 1.2 input	1	1	1
	HDMI 1.4 Input	1	1	1
	DVI Input	1	1	1
	USB Up	1	1	1
	Audio Input	1	1	1
Optional Input	AVAS Ndcoder	2 x SFP+ Module	2 x SFP+ Module	2 x SFP+ Module
Output	HDMI 1.4 Output	1	1	1
	USB Type-A			2
	Audio Output	1	1	1
Power	Rating	DC 12V/24V, 5.42 A max.	DC 12V/24V, 5.42 A max.	DC 12V/24V, 2.53 A max.

# Product Selection Guide

## PAX-3 Medical Display -Surgical Series



Model		PAX-324	PAX-327		PAX-332	
		FHD	FHD	4K	FHD	4K
LCD	Screen Size	24.1" (518.4 x 324.0 mm)	27" (597.89 x 336.31 mm)	27" (596.16 x 335.34 mm)	31.55" (698.4 x 392.9 mm)	32" (708.48 x 398.52 mm)
	Resolution	1920 x 1200	1920 x 1080	3840 x 2160	1920 x 1080	3840 x 2160
	Aspect Ratio	16:10	16:09	16:09	16:09	16:09
	Pixel Pitch	0.270 x 0.270 mm/0.010 x 0.010 in	0.3114 x 0.3114 mm	0.15 x 0.15 mm	0.36 x 0.36 mm	0.18 x 0.18 mm
	Viewing Angle	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
	Contrast Ratio	1000:1	1000:1	1000 : 1 / 1300:1	1200:1	1500:1
	Native Luminance	350/900 cd/m²	300/1000 cd/m²	350/800 cd/m²	450 cd/m²	850 cd/m²
	Color Depth	8-bit 16.7M/10-bit 1.07B colors		10-bit 1.07B colors	8-bit 16.7M colors	10-bit 1.07B colors
	Display Mode	AHVA	IPS/AHVA	AHVA	IPS	IPS
	Response Time	14ms (G to G)/14ms (Tr + Tf)/14ms (G to G)/ 16ms (Tr + Tf)			25ms (G to G)	20ms (Tr + Tf)
	Touchscreen	10-point PCAP (optional)	10-point PCAP (optional)	10-point PCAP (optional)	10-point PCAP (optional)	10-point PCAP (optional)
Input	DP 1.2 Input	1	1	1	1	1
	HDMI 2.0 Input	1	1	1	1	1
	HDMI 1.4 Input	-	-	-	-	-
	DVI Input	2	2	2	2	1
	SDI1 Input	1	1	-	1	-
	S-Video Input	1	1	-	1	-
	Video Input	1	1	-	1	-
	USB(Touch)	1	1	1	1	1
	USB Down	-	-	-	-	-
	RS-232C	1	1	1	1	1
	DC Power Input	1	1	1	-	-
Optional Input	RGB Input	1 (by model)	1 (by model)	-	1 (by model)	-
	Audio Input	1 (by model)	1 (by model)	-	-	-
	AVAS NDcoder	1 x SFP+ module, 1 x LAN RJ-45 jack by model	1 x SFP+ module, 1 x LAN RJ-45 jack by model	1 x SFP+ module, 1 x LAN RJ-45 jack by model	1 x SFP+ module, 1 x LAN RJ-45 jack by model	1 x SFP+ Port
	SDI Input	1, available upon request	1, available upon request	3Gx4 and 12G	-	3Gx4 and 12G
Output	DVI Output	2	2	1	2	1
	SDI1 Output	1	1	3Gx4 and 12G	1	3Gx4 and 12G
	S-Video Output	1	1	-	1	-
	Video Output	1	1	-	1	-
	DP 1.2 Output	-	-	1	-	1
	HDMI 2.0 Output	-	-	1	-	1
	DC Power Output	1 x DC jack, 5V or 12VDC	1 x DC jack, 5V or 12VDC	1 x DC jack, 5V or 12VDC	1 x DC jack, 5V or 12VDC	1 x DC jack, 5V or 12VDC
Optional Output	Audio Output	1 (by model)	1 (by model)	-	1 (by model)	-
	SDI2 Output	1*	1*	-	1*	1*
Environment	Operating Temperature	5 ~ 40°C/41 ~ 104°F	5 ~ 40°C/41 ~ 104°F	5 ~ 40°C/41 ~ 104°F	5 ~ 40°C/41 ~ 104°F	5 ~ 40°C/41 ~ 104°F
	Storage Temperature	-20 ~ 60°C/-4 ~ 140°F	-20 ~ 60°C/-4 ~ 140°F	-20 ~ 60°C/-4 ~ 140°F	-20 ~ 60°C/-4 ~ 140°F	-20 ~ 60°C/-4 ~ 140°F
	Operating Humidity	Ta = 40°C/104°F, 90% RH	Ta = 40°C/104°F, 90% RH	Ta = 40°C/104°F, 90% RH	Ta = 40°C/104°F, 90% RH	Ta = 40°C/104°F, 90% RH
	Storage Humidity	5 ~ 90%	5 ~ 90%	5 ~ 90%	5 ~ 90%	5 ~ 90%
	Pressure	500 ~ 1013 hPa	500 ~ 1013 hPa	500 ~ 1013 hPa	500 ~ 1013 hPa	500 ~ 1013 hPa
Power	Rating	DC 24V, 4.16 A max.	DC 24V, 4.16 A max.	DC 24 V, 6.25 A max.	DC 24V 10.41A max.	DC 24V 10.41A max.
	Consumption	65W max. (typical)	80W max.	100.4W max	80W max.	168.5W max.
Physical Characteristics	IP Rating	Front panel: IP65; top: IPX1				
	VESA Mount	100 x 100 mm/3.93 x 3.93 in; 75 x 75 mm/2.95 x 2.95 in	100 x 100 mm/3.93 x 3.93 in; 75 x 75 mm/2.95 x 2.95 in	100 x 100 mm/3.93 x 3.93 in; 75 x 75 mm/2.95 x 2.95 in	100 x 100 mm/3.93 x 3.93 in; 75 x 75 mm/2.95 x 2.95 in	100 x 100 mm/3.93 x 3.93 in; 75 x 75 mm/2.95 x 2.95 in
	Dimensions (W x D x H)	578.13 x 68 x 402.78 mm/22.76 x 2.67 x 15.85 in	663.83 x 73.55 x 418.11 mm	663.83 x 73.55 x 418.11 mm	768.99 x 79.55 x 484.03 mm	768.67 x 70.50 x 477.71 mm
	Weight	7.2 ~ 7.85 kg/15.87 ~ 17.3 lb	10 kg max.	10.36 kg max.	12.5 kg max.	13.26 kg max.
Certifications	EMC & Safety	CE,FCC,CCC,MDR (EN60601-1; EN60601-1-2), RoHS III				
Warranty	3 Years	3 years	3 years	3 years	3 years	3 years
Accessories	Power	1 x Power adapter	1 x Power adapter	1 x Power adapter	1 x Power adapter	1 x Power adapter

Spec change without prior notice  
\*Configurable upon request





Model		PAX-332 3D	PAX-355	PAX-365
		3D 4K	4K	4K
LCD	Screen Size	32" (708.48 x 398.52 mm)	55" (1209.6 x 680.4 mm)	65" (1480 x 900 mm)
	Resolution	3840 x 2160	3840 x 2160	3840 x 2160
	Aspect Ratio	16:09	16:09	16:09
	Pixel Pitch	0.1845 x 0.1845 mm	0.315 x 0.315 mm	0.37 x 0.37 mm
	Viewing Angle	178°/178°	178°/178°	178°/178°
	Contrast Ratio	1500:1	1100:1	1100:1
	Native Luminance	850 cd/m²	700 cd/m²	700 cd/m²
	Color Depth	10-bit 1.07B Colors	10-bit 1.07B Colors	10-bit 1.07B Colors
	Display Mode	AHVA	IPS	IPS
	Response Time	20ms (Tr + Tf)	8ms (G to G)	8ms (G to G)
	Touchscreen	10-point PCAP (optional)	10-point PCAP (optional)	10-point PCAP (optional)
Input	DP 1.2 Input	1	1	1
	HDMI 2.0 Input	1	1	1
	HDMI 1.4 Input	-	-	-
	DVI Input	1	1	1
	SDI1 Input	2 x 12G (optional)	1	1
	S-Video Input	-	-	-
	Video Input	-	-	-
	USB(Touch)	1	1	1
	USB Down	-	-	-
	RS-232C	1	1	1
	DC Power Input	-	-	-
Optional Input	RGB Input	-	1 (by model)	1 (by model)
	Audio Input	-	1 (by model)	1 (by model)
	AVAS NDcoder	-	1 x SFP + Port	1 x SFP + Port
	SDI2 Input	-	3Gx4 and 12G	3Gx4 and 12G
Output	DVI Output	1	1	1
	SDI1 Output	2 x 12G (optional)	3Gx4 and 12G	3Gx4 and 12G
	S-Video Output	-	-	-
	Video Output	-	-	-
	DP 1.2 Output	-	1	1
	HDMI 2.0 Output	-	1	1
	DC Power Output	1 x DC jack, 5V or 12VDC	1 x DC jack, 5V or 12VDC	1 x DC jack, 5V or 12VDC
Optional Output	Audio Output	-	1 (by model)	1 (by model)
	SDI2 Output	-	-	-
Environment	Operating Temperature	5 ~ 40°C/41 ~ 104°F	5 ~ 40°C/41 ~ 104°F	5 ~ 40°C/41 ~ 104°F
	Storage Temperature	-20 ~ 60°C/-4 ~ 140°F	-20 ~ 60°C/-4 ~ 140°F	-20 ~ 60°C/-4 ~ 140°F
	Operating Humidity	Ta = 40°C/104°F, 90% RH	Ta = 40°C/104 °F, 85% RH	Ta = 40°C/104 °F, 85% RH
	Storage Humidity	5 ~ 90%	Ta = 40°C, MAX 85% RH	Ta = 40°C, MAX 85% RH
	Pressure	500 ~ 1013 hPa	500 ~ 1013 hPa	500 ~ 1013 hPa
Power	Rating	DC 24V 10.41A max.	AC 100-240V, 50-60HZ, 6-3 A	AC 100-240V, 50-60HZ, 6-3 A
	Consumption	168.5W max.	125.5W /171.6W max. by model	125.5W /250W max. by model
Physical Characteristics	IP Rating	Front panel: IP65; top: IPX1	-	-
	VESA Mount	100 x 100 mm/3.93 x 3.93 in; 75 x 75 mm/2.95 x 2.95 in	600 x 400 mm	600 x 400 mm
	Dimensions (W x D x H)	768.67 x 70.50 x 477.71 mm	1279.0 x 75.0 x 747.4 mm	1279.0 x 75.0 x 747.4 mm
	Weight	13.26 kg max.	40.0 kg	55.0 kg
Certifications	EMC & Safety	CE,FCC,CCC,MDR (EN60601-1; EN60601-1-2), RoHS III		
Warranty	3 Years	3 years	3 years	3 years
Accessories	Power	1 x Power adapter	-	-

Spec change without prior notice

Note: Images are not scaled proportionally

## Product Selection Guide

### AVAS-200 Series

#### Medical Grade 4Kp60 Video Encoder/Decoder



		AVAS-212S	AVAS-223
Video	Output Resolution	Up to 4K UHD , uncompressed	
	Direct Display	Up to 4K UHD	
	Seamless Switching	Uncompressed video, latency < 1 ms	
	MultiView	Latency < 1 ms	
	Seamless Switching	Single, Picture-in-Picture, Side-by-Side, Quad view	
Audio		Analog audio in/out	
10G Network	Module	10GbE SFP+	10GbE SFP+ x2 (Dual Link) (optional for single link)
I/O	Video Interface	HDMI in (Encoder) /HDMI out (Decoder)	HDMI in (Encoder) /HDMI out (Decoder)
	USB Host	2 x USB 2.0 (Type-A)	
	USB Device	1 x USB 2.0 (Type-B)	
	Audio Input & Output	1 x 3.5 mm audio-in + 1x 3.5 mm audio-out (stereo)	
	DC Input	External PSU, 100~240V AC in / 12V@2.5A DC out	
Environmental		Operation temperature 0 ~ 40°C	
		Storage temperature -10 ~ 50°C	
Dimension		145.5 x 110 x 30.5 mm	168 x 136.3 x 30 mm

### AVAS-400 Series

#### Medical Grade 4K UHD Video Recorder



		AVAS-402
Video	Input Resolution	Up to 4K UHD (Capture)
	Output Resolution	Up to 4K UHD (Graphic engine)
	Compression Format	MPEG2, H.264, H.265
	Capture I/O (Optional)	UHD: HDMI 2.0 FHD: Y/PbPr, CVBS, S-Video, SDI, DVI
Audio		2 x Mic-in/ Line-out
System	CPU*	14th Gen Intel® Core™ i5/i7 Processor (i5/i7)
	Memory*	4 x U-DIMM sockets with support up to 128GB DDR5 4800MHz
	HDD*	1TB 2.5"
I/O	Display Interface	1 x HDMI, 2 x Display Port
	USB Host	12 (7 x USB 3.2 Type-A (2 front, 5 rear) /1 x USB 3.2 Type-C /4 x USB 2.0 Type-A)
	Ethernet	2 x RJ-45 GbE
	COM	1 x RS-232
	Audio In/Out	2 for Audio in/out 3.5mm stereo jack connectors
	Power	900W medical internal PSU, 100-240V AC in
Environmental		Operation temperature 0 ~ 40°C
		Storage temperature -10 ~ 50°C
Dimension (W x D x H)		320 x 145 x 329 mm
SDK Function		Streaming control, capture, recording, streaming, playback, editing, and tools

\*Configurable upon request

## AVAS-60 Series Mobile Surgical Video Workstation



AVAS-60E		
Dimension & Weight	Base Cart	
	Footprint	626 x 819 mm
	Height Adjustment Range	1800 ~ 2600 mm
	Gross Weight	100 ~ 160 kg*
	Display Holder	Standard VESA Mount (75/100)
	Accessory Integration Interface	Device Storage box
Archiving & Streaming System		
Video	Input Resolution	Up to 4K UHD (optional by capture)
	Output Resolution Compression Format	Up to 4K UHD (graphics engine) MPEG2, H.264, H.265 (record into HD & streaming out)
Streaming	Uncompress Format	Up to 4 channels (2 x cameras, 2 x externals)
I/O	Video Input	HDMI (converter required for different input source)
	Audio Input & Output	2 (Mic-in/ Line-out)
	Network	4 x 10GbE SFP+, 1 x RJ-45 GbE (depends on quantity of streaming devices and controllers)
Host System (Depends)	CPU	9th Gen Intel® Core™ i7 Processor
	Memory	16G
	HDD	1TB 2.5" SSD or HDD
Camera		
Panoramic View	Output Resolution	FULL HD
	Image Sensor	1/2.8" 1080p 60fps Exmor CMOS
	Camera Control	PTZ
	Zoom Ratio	Optical 12X
Surgical Field	Resolution	4K UHD
	Image Sensor	1/2.5" 2160p 60fps Exmor CMOS
	Zoom Ratio	Optical 12X
Medical Display		
Surgical Display	Display Size	2 x 24" FHD or 2 x 27" FHD/4K
Touch Controller		
Touch Display	Display Size	1 x 15.6" Touch LCD

## AVAS-800 Series Digital OR In-Wall Streaming Console



AVAS-865		
Display	Touch Panel	65" P-Cap, 10-point multi-touch
	Aspect Ratio	16:9
	Resolution (Max.)	4K UHD 3840 x 2160
	Video Input	1 x DP, 1 x HDMI
	DICOM / Gamma	DICOM GSDF Part 14 calibration and a Gamma=2.2 calibration
	Contrast Ratio	1100:1
Peripherals	Response Time	8ms
	Speaker	2 x 10W speaker
	Microphone	1 x Mic array module
	Camera	1 x FHD webcam (1920 x 1080)
Computing System (Optional)	Mainboard	ATX x86 Main Board
	CPU	4th / 5th Gen Intel® Xeon Scalable Processor
	Storage	1TB
	Memory	2 x 16GB, DDR5 ECC-REG 4400/4800 MHz RDIMM
	PCIe Slot	3 x PCIe x16 Gen5, 2 x PCIe x8 Gen5, 1 x PCIe x4 Gen5, and 1 x PCIe x1 Gen3
	M.2	1 x M.2 2280/22110 B/M-Key (SATA and PCIe)
	GPU (Optional)	NVIDIA RTX graphics or equivalent
Physical and Environmental	Capture Input (Optional)	4ch 4Kp60 HDMI, 4ch 3G-SDI, or 2ch hybrid HDMI/DVI/VGA/S-Video/YPbPr
	Cooling	Fan
	Operating Temp.	0°C to 40°C
	Operating Humidity	40°C @ 85%RH non-condensing
	Power	Power Supply Input 100 ~ 240V/50-60Hz, Max 2500W, 10A, 250AC
	Dimensions (W x D x H)	1,632 x 1,056 x 150 mm (Subject to Change)



# Product Selection Guide

## Medical Tablets



		AIM-68H	AIM-75H	AIM-78H	AIM-89H	MIT-W102
System	Processor	Intel® Alder Lake-N N200 Quad-core, 6M Cache up to 3.70 GHz	Qualcomm SDA660 (up to 2.2GHz)	Qualcomm SDA660 / SDM660 (up to 2.2GHz)	Intel® Core™ i5-1145G7E Quad-core, 1.5 GHz, 8M Cache up to 4.10 GHz	Intel® Pentium® N4200 Quad-core 1.1GHz burst frequency 2.5GHz
	Memory	8GB LPDDR5	4GB LPDDR4X	4GB LPDDR4X	8GB DDR4	4GB/8GB LPDDR4
	OS	Windows 10/11 IoT Enterprise	Android 12 Android Enterprise Recommended certification	Android 13	Windows 10/11 IoT Enterprise (Linux OS optional)	Windows 10 IoT Enterprise LTSC (Linux OS optional)
Storage	eMMC	-	64 GB	64 GB	256 GB (m.2)	-
	Micro-SD	-	Up to 2 TB	Up to 2 TB	-	-
	SSD	128/256 GB (m.2 NVMe)	-	-	-	64/128 GB (m.2 SSD)
Display	Type	10.1" LCD	8" IPS LCD	10" IPS LCD	13.3" IPS LCD	10.1" TFT LCD
	Resolution	WUXGA 1920 x 1200	WUXGA 1920 x 1200	WUXGA 1920 x 1200	WUXGA 1920 x 1200	1920 x 1200
	Brightness	800 cd/m²	400 cd/m²	380 cd/m²	400 cd/m²	
	Touch Type	10-point multi-touch P-CAP touch control	10-point multi-touch projected capacitive	10-point multi-touch P-CAP touch control		Multi-point projected capacitive touch
	Glass Type	Corning® Gorilla® Glass 3 Anti-Fingerprint, Anti-Glare				Enhanced glass with anti-glare coating
Communication	WLAN	IEEE 802.11 a/b/g/n/ac/ax (Wi-Fi 6E)	IEEE 802.11 a/b/g/n/ac/k/v/r		Normal (support under water puddle), Glove	Wireless IEEE 802.11a/b/g/n/ac
	Bluetooth	Bluetooth® v5.3	Bluetooth® v5.0 + BLE		Bluetooth® v5.2	Bluetooth V5.0,V4.2, V4.1, V4.0 LE, V3.0+HS, Bluetooth V2.1+EDR system
	NFC	13.56 MHz, compatible with ISO15693, ISO14443A, ISO 14443B, FeliCa		-		ISO 15693, ISO 14443A/B, FeliCa, MIFARE, Tag-it, My-D, M24LRXX, I code 2 (optional)
Connectivity	Standard I/O	1 x Type-C (Charging & DP), 1 x Type-A, 1 x combo audio jack, 1 x AIM docking pogo connector	1 x Type-C, 1 x combo audio jack, 1 x microSD card reader	1 x Type-C (data only), 1 x Type-A, 1 x combo audio jack, 1 x 19V DC-in jack, 1 x microSD card reader	2 x Type-A, 1 x audio jack, 1 x 19V DC-in jack, 1 x USB-C 3.1 Gen 2 (10Gb/s, HDMI Alt, 5V, 2A), 1 x Gigabit LAN, 1 x HDMI	1 x USB 3.0 Type-C supporting data/ charging/DP (output 5V/1A), 1 x USB 3.0 Type-A, 1 x DC jack, 1 x Combo audio, 1 x expansion port, 1 x docking port
	Extended I/O	-	1 x AIM dock 14-pin pogo connector: 1 x USB 2.0, 1 x 2-wire UART, 5V/1A power		-	-
	Docking	1 x AIM dock 16-pin pogo connector: 1 x USB 3.1 Gen 2	1 x AIM dock 16-pin pogo connector: 1 x USB2.0, 9V power	1 x AIM dock 16-pin pogo connector: 1 x USB 3.0, 12V power	1 x AIM dock 16-pin pogo connector: 1 x USB 3.1 Gen 2	-
	GPS		Glonass/Beidou/Galileo/QZSS/SBAS	-	-	-
Audio	Speaker	2 x Internal water proof speakers (2 W) – 83db @1m	1 x Internal speakers (1.5W)	2 x Internal speakers (2W)	2 x Internal water proof speakers (2 W)	1 x Internal speaker, 1 x internal mono microphone
	Audio Jack	1 x Audio combo jack (combines stereo audio output and mono microphone input)				
Camera	Front	5.0-megapixel fixed-focus camera		8.0-megapixel fixed-focus camera	5.0-megapixel fixed-focus camera	2-megapixel fixed-focus camera (optional)
	Rear	13.0-megapixel auto-focus camera with LED flash	8.0-megapixel auto-focus camera with LED flash	13.0-megapixel auto-focus camera with LED flash	8.0-megapixel auto-focus camera with LED flash	5.0-megapixel auto-focus camera with LED flash (optional)
Security		TPM 2.0	-	-	-	TPM 2.0
Sensors		Ambient Light Sensor, G-sensor, Gyroscope, E-compass	Ambient light sensor, e-Compass, G-sensor, Gyroscope			-
Control Buttons		1 x Power button, 2 x Volume keys (up/ down), 1 x Programmable button				1 x Power button, 2 x Programmable buttons
System Indicators		1x Power Indicator LED (Blue/Orange/ Green), 1x BCR Indicator LED (Blue/ Orange/Green)	1 x LED Indicators (Green/Blue/Red)	1 x LED Indicators (Green/Blue/Red)	-	Power, battery status, HDD, wireless connectivity, Bluetooth
Battery Capacity Indicators		-	Green:100% ; red:≤10% ; blue:charging			-
Power	Input Voltage	Type-C: 20V/3.25A (65W)	Type-C: 5V/3A, 9V/2A Docking pogo: 9V/2A	DC jack: 19V/3.43A Docking pogo: 12V/2A	DC jack: 19V/4.74A (90W)	100 ~ 240VAC, 50 ~ 60Hz, 1.4A ~ 0.8A
	Output Voltage	-	-	-	-	19VDC, 3.16A (max.), 60 W
	Battery	Battery Type: Embedded Lithium-ion battery Capacity: 4010 mAh, 46.3 WHr, 11.55V Operating Time: Up to 6.5 hours Charging Time: < 3 hours	Battery Type: Swappable battery Capacity: 4900 mAh, 18.62 WHr, 3.8V Operating Time: Up to 12 hours Charging Time: < 3 hours	Battery Type: Smart battery with capacity LED indicators Capacity: 2400 mAh, 26 WHr, 10.8V Operating Time: Up to 6 hours Charging Time: < 3 hours	Battery Type: Embedded Lithium-ion battery Capacity: 4660 mAh, 50.32 WHr, 10.8V Operating Time: Up to 4.5 hours Charging Time: < 3 hours	Battery Type: Main Battery Capacity: 2860 mAh, 31.7 WHr, 11.1V
Environment	Operating Temperature	0 ~ 40°C (32 ~ 104°F)	Wall Mount: 0 ~ 40°C (32 ~ 104°F) Handheld: 0 ~ 35°C (32 ~ 95°F)	Wall Mount: 0~40°C (32~104°F) Handheld: 0~35°C (32~95°F)	0 ~ 35°C (32 ~ 95°F)	0 ~ 35 °C (32 ~ 95 °F)
	Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)				
	IP Rating	IP65				
	Shock	IEC60068-2-27 standard MIL-STD-810G standard	SAE J1455	Operating: 10 ~ 20 G, 11 ms Nonoperating: 50 G, 11 ms	MIL-STD-810G standard	Operating: 20 G, 11 ms; shipping: 1 ~ 200 Hz, 1.15G (refer to ISTA 2A)
	Vibration	IEC60068-2-27 standard MIL-STD-810G standard	SAE J1455	Operating: (5 ~ 500 Hz) 0.5 ~ 1 G; Non-operating: (5 ~ 500 Hz) 0.04 PSD	MIL-STD-810G standard	Operating: (5 ~ 500GHz) 1G Non- operating: (5 ~ 500GHz) 4, 4 mm ~ 2G
	Humidity	Non-condensing Operating: 90% @40°C Storage: 95% @45°C Package: 95% @60°C	Non-condensing Operating: 10 ~ 90% @40°C Storage: 10 ~ 95%		Non-condensing Operating: 90% @40°C Storage: 95% @45°C Package: 95% @60°C	Non-condensing Operating: 10% ~ 95% @35°C/95°F Storage: 10% ~ 95% @60°C/140°F
Physical Characteristics	Drop Tested	Up to 122 cm (4 ft) onto plywood over concrete				Up to 152.4 cm (5 ft) onto plywood over concrete
	Dimesions (WxDxH)	280 x 180.1 x 183 mm (11 x 0.7 x 7.1 in)	240 x 142 x 14.5 mm (9.44 x 5.59 x 0.57 in)	280 x 18.3 x 180.1 mm (11 x 0.7 x 7.1 in)	330 x 240 x 20.8 mm (13 x 9.4 x 0.8 in)	292 x 196 x 20 mm (11.5 x 7.7 x 0.79 in)
	Weight	1.1 kg (2.42 lb)	600 g (1.32 lb)	980 g (2.2 lb)	1.8 kg (3.97 lb)	1.1 kg (2.4 lb) (base unit)
Certifications		FCC, CE, UKCA, IEC/EN/UL60601-1, EN 60601-1-2	IEC/UL/EN 60601-1, UL/CS 62368, FCC, CE, NCC/BSMI, TELECOM/CCI, B/C/M/C.CCC/SSRRC. EN1789	IEC/UL/EN 60601-1, FCC/IC, CE, NCC/BSMI, TELECOM/CCI, RCM, CCC/SSRC	FCC, CE, UKCA, IEC/EN/UL60601-1, EN 60601-1-2, WEEE	FCC Class B, CE, IEC/EN/UL 60601- 1, 62368-1

## VESA Dock



Applicable Model	AIM-75H	AIM-78H/AIM-68H	AIM-89H	MIT-W102
Part Number	AIM-VSD0-0001 (full I/O) AIM-VSD0-0003 (USB & charger)	AIM-VSD0-1001 (full I/O) AIM-VSD0-1003 (USB)	AIM-VSB0-0001	MIT-W102-ACCD001E
Features	[Full I/O] 2 x USB 3.0, 1 x RS-232 COM, 1 x Gigabit LAN, 1 x Power jack [USB & charger] 2 x USB 2.0, 1 x Power jack	[Full I/O] 2 x USB 3.0, 1 x RS-232 COM 1 x Gigabit LAN, 1 x Power jack [USB & charger] 2 x USB 2.0, 1 x Power jack	VESA MIS D Standard 75/100	1 x LAN 1 x VGA 1 x COM 2 x USB 2.0

## Desk Dock



Applicable Model	AIM-78H/AIM-68H	AIM-89H	MIT-W102	
Part Number	AIM-OFD0-0001 (full I/O) AIM-OFD0-0003 (USB & charger)	AIM-OFD0-0005	MIT-W102-ACCD001E	MIT-W101-ACCVB001E
Features	[Full I/O] 2 x USB 2.0, 1 x RS-232 COM, 1 x Power jack 1 x HDMI, 1 x Battery charging bay [USB & charger] 2 x USB 2.0, 1 x Power jack	1 x HDMI 1.3 1 x DisplayPort 1.1 1 x Gigabit Ethernet (RJ45) 2 x USB 3.0 Type-A 1 x 5.5 mm DC in port	1 x LAN 1 x VGA 1 x COM 2 x USB 2.0	VESA mount (75 x 75 mm)

## Vehicle Dock



## Multi-Bay Charging Station



## Battery



Applicable Model	AIM-68H/AIM-78H	AIM-75H	AIM-68H/AIM-75H/ AIM-78H	AIM-75H/AIM-78H	AIM-68H
Part Number	AIM-VED0-0422 (full I/O) AIM-VED0-0423 (charger)	AIM-MTCS-0001	AIM-MBCS-0001	AIM-BAT0-0252/AIM-BAT0-0452	AIM-BAT0-0552
Features	[Full I/O] 1 x CAN bus (supports raw CAN, J1939, OBD-II/ISO 15765) with configurable firmware 5 x Digital inputs 1 x Odometer (supports dry and wet contact) with configurable and switchable firmware (default wet contact) 2 x Digital outputs (supports speed pulse) 1 x RS-232 (4 wire) 1 x RS-232/485 (2 wire) (default RS-485, termination enabled) 1 x USB 2.0, 1 x Power input 12 V 1 A [Charger] 1 x Power input 12 V 1 A			AIM-75H: 4900 mAh, 18.62 Whr, 3.8V AIM-78H: 2400 mAh, 26 Whr, 10.8V	4010mAh, 46.31Whr, 11.55V

## Accessories



Applicable Model	AIM-68H/AIM-78H	AIM-68H/AIM-75H/AIM-78H			AIM-68H/AIM-78H
Part Number		AIM-SRP0-0004	AIM-SRP0-0000	AIM-SRP0-0001	AIM-SRP0-0002
Features	Robust design with a convenient handle	360° rotatable	One-handed operation	Hands-free usage	Hands-free usage

## Accessories



Applicable Model	AIM-89H		AIM-68H/AIM-75H/AIM-78H	MIT-W102
Part Number	AIM-SRP0-0008	AIM-SRP0-0007	AIM-SRP0-0006	AIM-P705
Features	Four-point secure mount	Hands-free usage	Ergonomic design for easy handling	High accuracy and precision

## Extension Modules



Applicable Model	AIM-68H/AIM-75H/AIM-78H		AIM-68H		AIM-75H
Part Number	AIM-BCRS-0020	AIM-BCRS-0070	AIM-P531A0	AIM-EXT0-0050	AIM-LANC-0001
Features	<ul style="list-style-type: none"> <li>Sensor: 640 x 480 CMOS sensor</li> <li>Illumination/Aimer: white LED illumination/red LED dot aimer</li> <li>Frame rate: 30 fps</li> <li>Field of view: horizontal: 37.8°; vertical: 28.8°</li> </ul>		1 x 10/100 Ethernet port	<ul style="list-style-type: none"> <li>RFID output: 25W</li> <li>Antenna type: Linear polarization</li> <li>Frequency: EU: 867 ~ 869 MHz</li> <li>Supported tag standard: EPC Class 2, Gen. 2/ ISO 18000-6C</li> </ul>	1 x 10/100 Ethernet port 1 x COM port

## Solution Package

### iWard Solution Offerings

					
Nursing Control Station	Nursing Dashboard	Mobile Nursing Station	Bedside Information Terminal	Patient Information Terminal	iWard Software Suite

### iVideOR Solution Offerings

				
Recorder	Surgical Monitor	Video Mobile Workstation	Medical Grade Video Encoder/Decoder	iVideOR Software Suite

### iOutpatient Solutions Offerings

			
Interactive Signage	Self Check-In & Queuing System	iClinic Kiosk	iOutpatient Software Suite

### RTLS Solutions Offering

		
BLE Tags	RTLS Receivers	RTLS Software Suite

### iEMS: Intelligent Energy Management Solutions

			
Power Meter	Gateway	Gateway	iEMS Software Suite



Regional Service & Customization Centers

<b>China</b>	Kunshan 86-512-5777-5666	<b>Taiwan</b>	Taipei 886-2-7732-3399	<b>Netherlands</b>	Eindhoven 31-40-267-7000	<b>Poland</b>	Warsaw 00800-2426-8080	<b>USA</b>	Milpitas, CA 1-408-519-3898
--------------	-----------------------------	---------------	---------------------------	--------------------	-----------------------------	---------------	---------------------------	------------	--------------------------------

Worldwide Offices

<b>Asia Pacific</b>		<b>Asia Pacific</b>		<b>Europe</b>		<b>Americas</b>	
<b>Taiwan</b>		<b>Japan</b>		<b>Netherlands</b>		<b>North America</b>	
Toll Free	0800-777-111	Toll Free	0800-500-1055	Eindhoven	31-40-267-7000	Toll Free	1-888-576-9668
Taipei & IoT Campus	886-2-7732-3399	Tokyo	81-3-6802-1021	Breda	31-76-523-3100	Cincinnati	1-513-742-8895
Taichung	886-4-2372-5058	Osaka	81-6-6267-1887	<b>Germany</b>		Milpitas	1-408-519-3898
Kaohsiung	886-7-392-3600	Nagoya	81-0800-500-1055	Toll Free	00800-2426-8080/81	Irvine	1-949-420-2500
<b>China</b>		Nogata	81-949-22-2890	Munich	49-89-12599-0	Ottawa	1-815-433-5100
Toll Free	800-810-0345	<b>Korea</b>		Düsseldorf	49-2103-97-855-0	Chicago	1-888-576-9668
Beijing	86-10-6298-4346	Toll Free	080-363-9494/5	<b>France</b>		Boston	1-800-866-6008
Shanghai	86-21-3632-1616	Seoul	82-2-3660-9255	Paris	33-1-4119-4666	<b>Brazil</b>	
Shenzhen	86-755-8212-4222	<b>Singapore</b>		<b>Italy</b>		Toll Free	0800-770-5355
Chengdu	86-28-8545-0198	Singapore	65-6442-1000	Milan	39-02-9544-961	São Paulo	55-11-5592-5367
Hong Kong	852-2720-5118	<b>Malaysia</b>		<b>UK</b>		<b>Mexico</b>	
		Kuala Lumpur	60-3-7725-4188	Newcastle	44-0-191-262-4844	Toll Free	1-800-467-2415
		Penang	60-4-537-9188	London	44-0-870-493-1433	Mexico City	52-55-6275-2777
		<b>Thailand</b>		<b>Spain</b>		Guadalajara	52-33-3169-7670
		Bangkok	66-02-2488306-9	Madrid	34-91-668-86-76	<b>Middle East and Africa</b>	
		<b>Vietnam</b>		<b>Sweden</b>		Israel	072-2410527
		Hanoi	84-24-3399-1155	Stockholm	46-0-864-60-500	Turkey	90-212-222-0422
		Hochiminh	84-28-3836-5856	<b>Poland</b>		Turkey-Bursa	90-224-413-3134
		<b>Indonesia</b>		Warsaw	48-22-31-51-100		
		Jakarta	62-21-751-1939	<b>Russia</b>			
		<b>Australia</b>		Moscow	8-800-555-01-50		
		Toll Free	1300-308-531	St. Petersburg	8-812-332-57-27		
		Melbourne	61-3-9797-0100	<b>Czech Republic</b>			
		<b>India</b>		Ústí nad Orlicí	420-465-524-421		
		Bangalore	91-94-4839-7300	<b>Ireland</b>			
		Pune	91-94-2260-2349	Galway	353-91-792444		



Enabling an Intelligent Planet

www.advantech.com

Please verify specifications before ordering. This guide is intended for reference purposes only. All product specifications are subject to change without notice. No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher. All brand and product names are trademarks or registered trademarks of their respective companies. © Advantech Co., Ltd. 2025



8600000669